

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 714 778 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**22.03.2000 Bulletin 2000/12**

(51) Int Cl.7: **B41J 2/17, B41J 2/165**

(86) International application number:  
**PCT/JP95/00927**

(21) Application number: **95918189.2**

(87) International publication number:  
**WO 95/31335 (23.11.1995 Gazette 1995/50)**

(22) Date of filing: **16.05.1995**

(54) **INK JET RECORDER AND METHOD OF CLEANING RECORDING HEAD**

TINTENSTRAHLDRUCKER UND REINIGUNGSVERFAHREN DES AUFZEICHNUNGSKOPFES  
ENREGISTREUR A JET D'ENCRE ET PROCEDE DE NETTOYAGE DE LA TETE  
D'ENREGISTREMENT

(84) Designated Contracting States:  
**CH DE FR GB IT LI NL SE**

• **FUKUSHIMA, Toru**  
Suwa-shi, Nagano 392 (JP)

(30) Priority: **17.05.1994 JP 10303494**  
**23.05.1994 JP 10869394**  
**12.09.1994 JP 21745094**  
**14.10.1994 JP 24986294**  
**31.03.1995 JP 9973495**  
**06.04.1995 JP 8141795**  
**20.04.1995 JP 9571395**

(74) Representative:  
**DIEHL GLAESER HILTL & PARTNER**  
Patentanwälte  
Augustenstrasse 46  
80333 München (DE)

(43) Date of publication of application:  
**05.06.1996 Bulletin 1996/23**

(56) References cited:  
**EP-A- 0 362 897 EP-A- 0 465 260**  
**EP-A- 0 585 923 WO-A-81/02061**  
**WO-A-87/04979 JP-A- 4 028 559**  
**JP-A- 51 077 036 US-A- 4 500 894**  
**US-A- 4 558 326 US-A- 5 159 348**

(73) Proprietor: **SEIKO EPSON CORPORATION**  
Shinjuku-ku, Tokyo 163-0811 (JP)

(72) Inventors:  
• **KANBAYASHI, Kenichi**  
Suwa-shi, Nagano 392 (JP)  
• **NIIMURA, Hiroe**  
Suwa-shi, Nagano 392 (JP)  
• **KUMAGAI, Toshio**  
Suwa-shi, Nagano 392 (JP)

• **PATENT ABSTRACTS OF JAPAN vol. 013, no.**  
**400 (M-867), 6 September 1989 & JP-A-01 145155**  
**(NEC CORP), 7 June 1989,**  
• **PATENT ABSTRACTS OF JAPAN vol. 011, no.**  
**330 (M-636), 28 October 1987 & JP-A-62 111751**  
**(CANON INC), 22 May 1987,**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 714 778 B1**

1

EP 0 714 778 B1

2

## Description

[0001] This invention relates to an ink jet recorder having an ink jet recording head mounted on a carriage and an ink cartridge placed in a box for supplying ink to the recording head via a tube from an ink tank, and a recording head cleaning method.

[0002] An ink jet recorder has an ink jet recording head mounted on a carriage for spouting ink drops by pressure generation means for printing while receiving ink supply from an ink tank; usually, an ink cartridge is also mounted on the carriage provided with the recording head for simplifying the structure.

[0003] On the other hand, the dot density increases drastically as performance of ink jet recording heads improves, enabling color printing in natural color; to furthermore improve the print quality, an effort is under way to lessen blurs on recording media as much as possible.

[0004] As one means, a method is proposed, wherein an emulsion or saccharides is contained in ink and recording media are filmed with ink drops.

[0005] With ink having such a filming property, it is highly feared that a porous substance required for an on-carriage type cartridge may interfere with an ink flow into a recording head. Thus, a separate ink supply method is proposed wherein while a subtank is mounted on a carriage, ink is drawn from an ink cartridge placed in a box and is supplied via the subtank to a recording head.

[0006] For example, as disclosed in Japanese Patent Publication No. Hei 4-43785, a recording head and a subtank are mounted on a carriage and the subtank and a main tank are connected by a tube and after new ink is drawn into the subtank, ink is supplied from the subtank to the recording head.

[0007] According to the method-, in addition to smooth supply of ink to the recording head because of the absence of a porous substance, the entire carriage can be lightened for high-speed printing and prolonging the replenishment period with ink. However, as the carriage reciprocates, bubbles occurring in the subtank enter the recording head, hindering ink spouting.

[0008] To solve such a problem, a method wherein a recording head, a subtank, and an ink cartridge are connected as an endless loop for circulating ink is also proposed, as eg disclosed in document US-A-5 159 348. However, since this method requires two flow passages of going and returning, the flow passage structure is complicated. Also, ink needs to be fed by a pump, and comes in contact with movable members, causing ink and the pump to degrade.

[0009] It is therefore an object of the invention to provide an ink jet recorder comprising an ink supply system which can exclude bubbles in a recording head and further prevent ink in the recording head from forming a film or increasing viscosity without complicating the structure.

[0010] It is another object of the invention to provide

components appropriate for such an ink supply system.

[0011] It is a further object of the invention to provide a maintenance method by which the ink drop spout capability of the recording head can be recovered by actively using the components.

[0012] To these ends, according to the invention, there is provided an ink jet recorder wherein an ink jet recording head and a subtank are mounted on a carriage, ink is supplied by ink supply means from an ink cartridge placed outside the carriage to the subtank, and during printing, ink is supplied from the subtank to the recording head, characterized in that the ink jet recording head comprises two common ink chambers communicating with both sides of pressure generation chambers and ink supply ports where ink flows into the common ink chambers from the outside, one ink supply port being connected to the subtank and the other being connected to the ink cartridge, wherein the subtank is replenished with ink through the ink jet recording head by the ink supply means.

[0013] Thus, the ink from the ink cartridge passes through the recording head before flowing into the subtank, so that bubbles remaining in the recording head and a high concentration of ink near nozzle openings are forcibly discharged and are mixed with new ink in the subtank to a proper concentration, then the resultant ink is supplied to the recording head.

[0014] In the accompanying drawings:

[0015] Figure 1 is a schematic diagram showing one embodiment of a printer to which an ink supply system of the invention is applied. Figures 2 and 3 show each one embodiment of an ink jet recording head used with the system; Figure 2 is a horizontal sectional view of the head at the center of an ink supply port and Figure 3 is a front view of the head when a nozzle plate is removed. Figure 4 is a schematic diagram showing an overview of the ink supply system of the invention. Figure 5 is a perspective view of assembly showing one embodiment of a subtank built in a carriage. Figure 6 is an illustration showing flow passages of a flow passage component. Figure 7 is a drawing showing the structure of a subtank.

[0016] Figures 8 and 9 are a perspective view and a top view, respectively, showing one embodiment of an ink cartridge. Figure 10 is an illustration showing a state in which an ink cartridge is not mounted; Figure 11 is an illustration showing a state in which an ink cartridge is mounted and an ink supply needle is not inserted; and Figure 12 is an illustration showing a state in which an ink supply needle is inserted.

[0017] Figure 13 is a side view showing another embodiment of the ink cartridge and Figure 14 is a top view showing an embodiment for applying the ink cartridge to color ink.

[0018] Figures 15 (a) and (b) are a perspective view of assembly and a sectional view showing one embodiment of an air pump. Figure 16 is an illustration showing an arrangement of members placed in a nonprint area. Figure 17 is a perspective view of assembly showing

one embodiment of capping means. Figure 18 is an illustration showing an arrangement of nozzle openings of a recording head. Figure 19 is a drawing showing one embodiment of capping means and a waste ink tank placed in a nonprint area.

[0019] Figures 20 (a) to (d) are illustrations showing the operation of the capping means. Figure 21 (a) and (b) are illustrations each showing a process in which a cap member abuts the recording head. Figure 22 is a drawing showing a state in which nozzle openings are sealed with a cap member.

[0020] Figure 23 is an illustration showing one embodiment of a waste ink absorption material housed in the waste ink tank. Figure 24 (a) to (c) are illustrations showing a waste ink absorption process. Figure 25 is an illustration showing another embodiment of the waste ink absorption material.

[0021] Referring now to the accompanying drawings, there are shown embodiments of the invention.

[0022] Figure 1 shows one embodiment of an ink jet printer to which an ink supply system of the invention is applied. In the figure, numeral 1 is a carriage being supported by guide members 2 and 3 for moving in parallel with a rotation shaft 5 of a platen 4 described below. Mounted on the carriage 1 are a recording head 8 directly connected to an ink cartridge 6 (described below) by a tube 7 and a subtank 10 being connected to the recording head 8 by a tube 9 for temporarily storing ink. Disposed in a nonprint area are capping means capable of abutting the recording head 8 and a waste ink tank 17 for storing ink discharged from the recording head 8.

[0023] Numeral 4 is the above-mentioned platen for holding a sheet of recording paper taken by a pick-up roller 12 from a paper feed tray 11 on the surface by a claw member 13 and receiving ink drops from the recording head 8 on the sheet of recording paper for forming dots and discharging it into a paper discharge port 14 while ink is being dried by a heater.

[0024] Numeral 6 is the above-mentioned ink cartridge into which an ink supply needle is inserted by a lever 15 that can be handled from the outside of a box 18 for supplying ink to the recording head 8 via the ink tube 7 connected to the needle. Numeral 19 is an exhaust fan.

[0025] Figures 2 and 3 show each one embodiment of the ink jet recording head 8, wherein numeral 20 is a nozzle plate with nozzle openings 21 placed in a linear or staggered arrangement for sealing a spacer 22 described below. Numeral 22 is the spacer formed with through holes so as to partition pressure generation chambers 24, 24, 24... by forming bulkheads 23, 23, 23 at equal intervals so as to separate adjacent nozzle openings 21, 21, 21; it has one face sealed by the nozzle plate 20 and the other sealed by a vibration plate 25. Common ink chambers 26 and 27 are disposed on both sides of the pressure generation chambers 24, 24, 24...; ink is moved via the pressure generation chambers 24 from one common ink chamber 26 to the other common

ink chamber 27. Numeral 28 is a piezoelectric vibrator comprising an electrode and piezoelectric vibration material laminated like a sandwich so as to generate vibration in a longitudinal vibration mode; the tips of as many piezoelectric vibrators as the nozzles 21, 21, 21 are abutted against the vibration plate 25 and the opposite end is fixed to a base 29. They are lengthened according to a print signal for spouting ink drops through nozzle openings 21.

[0026] Numerals 30 and 31 are a first ink supply port and a second ink supply port communicating with the common ink chambers 26 and 27 respectively; they are connected to the ink cartridge 6 and the subtank 10 via the tubes 7 and 9.

[0027] Figure 4 is an overview of the ink supply system in the ink jet printer of the invention. The first ink supply port 30 of the recording head 8 mounted on the carriage 1 is connected to an ink bag 41 housed in the cartridge 6 by the tube 7. Likewise, the subtank 10 mounted on the carriage 1 is connected to the second ink supply port 31 of the recording head 8 by the tube 9. If the ink bag 41 is pressurized by supplying pressure air to a space 6a of the cartridge 6 by liquid feed means (in the embodiment, an air pump 40 supplying air to the airtight space 6a of the cartridge 6) in a state in which the nozzle openings 21 are sealed by the capping means described below, the ink bag 41 in the cartridge is compressed, causing ink in the ink bag 41 to flow through the tube 7 into the first ink supply port 30 of the recording head 8. The ink flows from one common ink chamber 26 through the pressure generation chamber 24 into the other common ink chamber 27, then exits the second ink supply port 31 and flows into the subtank 10.

[0028] In this process, bubbles remaining in the common ink chambers 26 and 27 and the pressure generation chamber 24 and ink whose concentration increases near the nozzle openings 21 are discharged into the subtank 10, and the nozzle openings 21 and the pressure generation chambers 24 are washed with new ink. When replenishment of the subtank with ink proceeds and space pressure of the subtank 10 raises, only air is discharged into the atmosphere from an air vent valve 42. When the subtank 10 is filled with ink to the full ink level, a signal is output from an ink full sensor 43, stopping the air pump 40, the air vent valve 42 being automatically closed.

[0029] Then, the ink in the subtank 10 reversely flows via the tube 9 through the recording head 8 into the ink cartridge 6 due to the head difference based on the height difference between the carriage 1 and the cartridge 6. As the reverse flow into the ink cartridge 6 proceeds and the ink amount of the subtank 10 lessens, an ink empty sensor outputs a signal, thus the air pump 40 operates for again replenishing the subtank 10 with ink via the recording head 8 from the ink cartridge 6. When the subtank 10 fills with ink, air supply from the air pump 40 stops. As ink flows by replenishing the subtank 10 with ink, ink in the recording head 8 is once discharged

into the subtank 10 and mixed with new ink with which the subtank 10 is replenished to concentration appropriate for printing as much as possible, then the mixed ink again flows into the recording head 8.

**[0030]** Reciprocating circulation of ink between the subtank 10 and the ink cartridge 6 via the recording head 8 by replenishing the subtank 10 with ink each time ink in the subtank 10 reversely flows and decreases is repeated for washing the pressure generation chambers 24 of the recording head 8, the common ink chambers 26 and 27, and the nozzle openings 21 with new ink and maintaining the ink concentration to an optimum value for printing.

**[0031]** Next, components making up the ink supply system described above will be discussed.

**[0032]** Figure 5 shows an embodiment of the subtank 10 and the recording head 8 integrated into a flow passage component. In the figure, numeral 50 is a recording head unit with recording heads 8, 8, 8, for spouting black, yellow, cyan, and magenta ink drops, fixed integrally with a base 52 for attachment to a window 1a of the carriage 1. The first and second ink supply ports 30 and 31 connected to the two common ink chambers of each recording head 8 are projected from the rear face of the base 52.

**[0033]** Numeral 53 is a filter member formed with an L-letter through hole 55 opened to the position facing the second ink supply ports 31 of the recording heads 8, 8, 8 and a bottom face 54 and a T-letter through hole 56 penetrated from the face opposed to the first ink supply port 30 to an opposed face 58 and opened to the bottom face 54; a filter 57 is inserted into the through hole 56 and a face 58 is sealed with a flexible film 59.

**[0034]** Numeral 60 is a flow passage component consisting of a top face 61 joined to the bottom face 54 of the filter member 53 and a main unit 62 used as a fixed base board of the sub tanks 10, 10, 10; the ink tube 7 from the ink cartridge 6 is attached to the top face 61.

**[0035]** As shown in Figure 6, the flow passage component 60 has inflow ports 63a on the top face 61 joined to the bottom face 54 of the filter member 53 for communicating with the through hole 55, ports 63b communicating with the bottoms of the sub tanks 10 described below, grooves 65 formed on a side face 64 and communicating with the ports 63a and 63b on both ends, through holes 66 each having one end connected to the T-letter through hole 56 of the filter member 53, and grooves 67 formed on the bottom face, each having one end connected to the tube 7. The grooves 65 and 67 on the side face 64 and the bottom face are sealed with flexible films 68 and 69.

**[0036]** A part of the flow passages is formed as the grooves 65 and 67 and the opening faces are sealed with the flexible films 68 and 69, whereby pressure change caused by ink fluctuation caused by a move of the carriage 1 during printing can be promptly absorbed by the flexible films 68 and 69 for maintaining the ink pressure of the recording head 8 as constant as possible.

ble.

**[0037]** Referring again to Figure 5, numerals 10, 10, and 10 are the above-mentioned sub tanks, each consisting of a frame 71 whose top and bottom are formed like a ship and a non-permeable flexible film 72 turned at a turn 72a with the top and bottom ends of one half bonded to each other; the top and bottom of the opening side of the other half and the end peripheral surface are pasted to the frame 71.

**[0038]** As shown in Figure 7, a pipe 73 inserted into a connection port 70 formed in the port 63b of the flow passage component 60 is disposed on the front bottom of the frame 71 and an air vent opening 74 is disposed on the top. A valve 77 formed with a through hole 75 and having a tip on which a film 76 made of permeable and water-repellent fluororesin, etc., is put is inserted into the opening 74 in a state in which it is pressed down by a spring 78 for opening the valve 77 when the inside becomes a given pressure.

**[0039]** A sensing piece 79 having one end fixed to the frame 71, the opposed end extending to detection means 85, and the center always coming in elastic contact with the side of the film 72 is disposed to sense a state in which the sub tank 10 fills with ink, namely, an ink full state. Further, a light transmission region 80 is provided at the lower part near the turn 72a for detecting a state in which ink runs out in the sub tank 10, namely, an ink empty state.

**[0040]** If a synthetic resin film coated with aluminum, etc., to provide non-permeability is used as the flexible film 72, the light transmission region 80 can be simply formed by avoiding the coating with aluminum only in the region 80 as a synthetic resin film. Since the light transmission region 80 is formed near the return 72a, if the sub tank 10 becomes close to the ink empty state, ink is excluded due to elastic energy of the film at the return 72a and the films are brought into intimate contact with each other, so that the ink existing between the films is excluded and the light absorption degree by the pigment forming the ink extremely lessens, enabling reliable detection of the ink empty state.

**[0041]** Referring again to Figure 5, numeral 82 is a protective case. As the ink full sensor 43 and the ink empty sensor 44, sensors 85 and 86 for detecting a move of the sensing piece 79 and presence or absence of light transmitting the light transmission region 80 are disposed in through holes 83 and 84 made in positions facing the sensing piece 79 and the light transmission region 80 when the protective case 82 is fitted into the flow passage component 60. The ink empty sensor 44 consists of a pair of a light emitting element for emitting light with a long wavelength such as infrared rays indicating a large light absorption degree for the pigment contained in ink and a light receiving element having sensitivity for long light. Numeral 88 is a recess for housing the spring 78.

**[0042]** Figures 8 and 9 show one embodiment of the above-mentioned ink cartridge 6, wherein numeral 100

is a cartridge containing the ink bag 41, formed as a case containing a main unit 100a and a lid 100b joined by bond means that cannot be stripped off during the operation, but can be stripped off by a jig, etc., such as double-acting adhesive tape, so as to communicate with the air pump 40 in the internal space 6a.

**[0043]** The cartridge 100 has both sides formed with protrusions 101 and 102 selectively engaging grooves 111, 112, and 113 of a cartridge holding frame 110 described below and the rear end formed with a projection 103 engaging a recess 115 on the rear end of a lever 114. It has the top face formed with an insertion hole 104 (not shown) of an ink supply needle 116 connected to the tip of the tube 7 and a front face formed with a recess 117 for locking the lever 114.

**[0044]** Numeral 16 is an insertion member of the above-mentioned ink supply needle. The ink supply needle insertion member 16 is attached up and down movable to a guide member 118 formed on the top face of the cartridge holding frame 110 with a needle protective member 122 (described below) sandwiched between the insertion member 16 and the cartridge holding frame 110. It has both sides formed with projections 120 engaging long holes 119 of the lever 114 and moving up and down following rotation of the lever 114. On the other hand, the needle protective member 122 consists of an elastic member 123 such as a spring for always pressing the ink supply needle insertion member 16 upward and a packing member 124 being placed in a lower part for elastically sealing a needle hole 116a and the needlepoint of the ink supply needle 116 when the ink supply needle 116 is at an upper position.

**[0045]** Numeral 114 is the above-mentioned lever which has the center engaging the ink supply needle insertion member 16 via the long hole 119 and the rear end formed with a recess 115 engaging the projection 103 of the cartridge 100 for pivoting with the point as a supporting point. Disposed on the front of the lever 114 are a handle 15 that can be pressed down from the outside of the printer box 18 and a claw 121 fitted into the recess 117 of the cartridge 100 at a position where it is completely lowered.

**[0046]** When the ink cartridge 100 is not mounted (Figure 10), the needle hole 116a and the needlepoint of the ink supply needle 116 are surrounded by the packing member 124. Thus, even if a person touches the ink supply needle 116 carelessly, he or she is not injured with the needlepoint, and volatilization of the ink solvent and adhesion of dust can be prevented.

**[0047]** If the ink cartridge 100 is inserted matching with the grooves 111, 112, and 113 of the cartridge holding frame 110 through a cartridge insertion window of the printer box 18, it is guided by the holding frame 110 for moving to the depth. In this process, the projection 103 is fitted into the recess 115 of the lever 114, stopping the move of the cartridge 100 (Figure 11).

**[0048]** When the lever 114 is pressed down, the ink supply needle 116 projects from the packing member

124 against the elastic member 123 and is inserted into the ink bag 41 airtightly through a packing member 41a of the ink bag 41 from the insertion hole of the cartridge 100. While the ink supply needle 116 projects from the packing member 124, dust, ink dregs, etc., adhering to the needlepoint are swept away with the packing member 124, preventing foreign material from getting mixed with ink in the ink bag 41. When the lever 114 is furthermore pressed down, the claw 121 engages the recess 117 on the front of the cartridge 100 for fixing the lever 114 to the cartridge 100, preventing the ink supply needle 116 from being drawn out carelessly, and the cartridge 100 is pressed by the lever 114, disabling the cartridge from being taken out (Figure 12).

**[0049]** On the other hand, when ink in the ink bag 41 has been consumed, if the lever 114 is pulled up against the engagement force of the claw 121, the claw 121 becomes elastically deformed and is detached from the recess 117 of the cartridge 100. When the lever 114 is furthermore pulled up to the upper limit, the ink supply needle insertion member 16 is pulled up by the lever 114 and the needlepoint is housed in the packing member 124. The cartridge 100 is taken out from the cartridge holding frame 110, a new cartridge 100 is mounted on the cartridge holding frame 110, and the lever 114 is pressed down to the lower limit. The cartridge replacement is now complete.

**[0050]** Although the projections 103 and 103 are formed on both sides near the rear end of the cartridge 100 for forming the pivot supporting point of the lever 114 in the embodiment, a similar effect can also be produced by extending a part of the lever 114 so as to reach a rear end 100c of the cartridge 100 for forming a pivot supporting point formation part 126 and by forming the rear end 100c of the cartridge 100 with a thin part 127 capable of engaging the pivot supporting point formation part 126.

**[0051]** By the way, since different types of ink are supplied by different cartridges at a color printer, if cartridges of colors corresponding to color heads are not mounted, color mixture occurs. Figure 14 shows an embodiment suitable for use of ink cartridges having the same outer form as supply means of ink of colors, wherein numerals 128 to 131 are thin parts spaced from each other capable of engaging the pivot supporting point formation part 126 formed on the rear end of the cartridge 100. Slits 132 are formed between the thin parts and the main unit of the cartridge 100 so as to be broken off by a bending force more than the torque received from the lever 114.

**[0052]** According to the embodiment, different positions of the pivot supporting point formation part 126 of the lever 114 are set for each color of ink, and only a specific thin part is left for each ink color and others are cut off from the slits 132 on the cartridge side.

**[0053]** If a cartridge of a different color is inserted, the pivot supporting point formation part 126 of the lever 114 does not engage the thin part. Even if the lever 114 is

pressed down, a force for pressing down the ink supply needle 116 against the elastic member 123 cannot be given, thus the ink supply needle 116 can be prevented from being inserted into a different color cartridge.

[0054] According to the embodiment, ink cartridges mass produced as consumables are manufactured with the same metal mold and when ink color is determined, the thin parts 128-131 may be cut off, thus manufacturing costs can be reduced owing to use of common metal molds to the cartridges. In the embodiment, the cartridge 100 is separated into two members, which are joined as a unit by bond means that can be stripped off. Therefore, if a cartridge with consumed ink is collected and is separated into the main unit 100a and the lid 100b with a jig, it can be recycled simply by replacing the ink bag 41.

[0055] Figures 15 (a) and (b) show one embodiment of the air pump 40, wherein numeral 140 is a base. The top face of the base 140 is formed with check valve chambers 145 and 146 for housing two check valves 142 and 143 making up a pump together with a diaphragm 141 described below, an atmosphere communication port 147 used as a valve seat of a pressure regulation valve, and an electromagnetic valve chamber 152 comprising outlets 150 and 151 connected to each cartridge 6 on the lower end. The diaphragm 141 made of an elastic material such as rubber is fixed in airtight relation to a bottom face 153 opposed to the check valve chambers 145 and 146.

[0056] The check valve chamber 145 serving as a suction port communicates with the atmosphere via a groove 154 and the check valve chamber 146 serving as a discharge port communicates with the electromagnetic valve chamber 152 via a groove 155. The electromagnetic valve chamber 152 is provided with a plurality of exhaust ports on the bottom (in the embodiment, four exhaust ports 150 and 151) as described above, which are provided sealably with electromagnet valves 156-159.

[0057] Numeral 160 is a lid formed with a window 161 in a part opposed to the atmosphere communication hole 147 serving as the valve seat for sealing the top face of the main unit case 140 via a packing plate 162 capable of covering at least the peripherals and openings. Numeral 163 is a pressure plate inserted into the window 161 for bringing the packing plate 162 into elastic contact with the through hole 147 under a constant pressure determined by springs 164 and 165.

[0058] Numeral 168 is a diaphragm drive piece having one end pivotally fixed to the base 140 via an elastic member 169 such as rubber and the other end to which a magnet 171 receiving an alternating field from a solenoid 170 is fixed so as to always come in contact with the diaphragm 141. Numeral 173 is a pressure regulation rod pivotally disposed on the lid 160.

[0059] When an alternating current is supplied to the solenoid 170 in the structure, the diaphragm drive piece 168 vibrates with the elastic member 169 side as a sup-

porting point, compressing and expanding the diaphragm 141. If compressed air is supplied from the check valve 143 to the electromagnetic valve chamber 152 and the air pressure exceeds the pressure set by the springs 164 and 165, the pressure plate 163 moves upward against the pressure of the springs 164 and 165, letting a part of air escape from the through hole 147 for maintaining the air pressure in the electromagnetic valve chamber 152 to a given value, namely, an appropriate value for pushing up ink to the recording head 8 from the cartridge 6 (in the embodiment, gage pressure 0.02 to 0.04 (kg/m<sup>2</sup>)).

[0060] If the electromagnetic valves 156-159 are opened in this state, pressure-regulated air flows from the exhaust ports 150 and 151 into the airtight space 6a of the cartridge 6, whereby the ink bag 41 is compressed, making ink flow into the recording head 8 through the tube 7 and further flow from the recording head 8 into the subtank 10. When the ink full sensor 43 senses that the subtank 10 fills with ink, the electromagnetic valves 156-159 are closed. If the ink full sensor 43 does not sense the ink full state although the predetermined time has elapsed, it is judged that the remaining amount of ink in the ink cartridge 6 becomes extremely small.

[0061] Ink in the subtank 10 reversely flows via the recording head 8 into the ink cartridge 6 due to the head difference (in the embodiment, 10 cmH<sub>2</sub>O). If the ink empty sensor 44 detects an ink empty state, the electromagnetic valves 156-159 are opened, again supplying air to the ink cartridge 6 for supplying ink via the recording head 8 to the subtank 10 until it fills with ink. Thus, the ink amount in the subtank 10 is maintained in a predetermined range for printing while the electromagnetic valves 156-159 are opened and closed in response to the signals of the ink empty sensor 44 and the ink full sensor 43.

[0062] Next, auxiliary members disposed in the non-print area for supporting the ink supply system will be discussed.

[0063] Figure 16 shows an arrangement of the members in the move direction of the carriage 1 in the recorder, wherein numeral 180 is capping means for sealing the recording head 8 and numeral 17 is a waste ink tank for storing ink discharged from the recording head 8. The capping means 180 and the waste ink tank 17 are placed outside the print area of the carriage 1; the capping means 180 is placed to the height opposed to the recording head 8 and the waste ink tank 17 is placed just below the capping means 180.

[0064] Figure 17 shows one embodiment of the capping means, wherein numeral 183 is a cap member formed with a plurality of projections so as to match the arrangement of nozzle openings 21 of the recording head 8 for spouting black ink drops, nozzle openings 21C for spouting cyan ink drops, nozzle openings 21M for spouting magenta ink drops, and nozzle openings 21Y for spouting yellow ink drops (Figure 18) in the em-

11

EP 0 714 778 B1

12

bodiment, projections 184 and 185 for sealing two rows of the nozzle openings 21B for spouting black ink drops and projections 186, 187, and 188 for sealing the nozzle openings 21C, 21M, and 21Y for spouting color ink drops. For example, the projection 184 will be discussed for providing a plane at the center abutting the nozzle openings and rounding so as to dent to the recess side on the boundaries between the projection and recesses 190-194. As seen in Figure 22, it is made of chemically resistant silicon-family rubber having hardness of JIS hardness 40 to 60, preferably 60 so as to form a plane 184a at the center abutting the nozzle openings 21 and rounds 184b and 184c on both sides distant from the nozzle openings 21B.

**[0065]** Numeral 195 is a cap member fixing frame formed as a frame coming in elastic contact with the peripheral surface of the cap member 183 for holding the cap member 183 with the projections 184-188 exposed. It has a top face 196 and a bottom face 197 formed with projections 198, 198 outward projecting, spaced from each other at a given distance, and a side face 199, which is opposed to the recording head 8 and becomes the home position side, formed with an abutment piece 200 abutting the side of the recording head 8 when it moves to the capping position.

**[0066]** Numeral 202 is a cap member support formed as a frame having a "C"-shaped cross section with both sides and front opened. It has a top face 203 and a bottom face 204 formed with guide grooves 205 in which the projections 198 of the cap member fixing frame 195 are fitted. A blade 206 made of an elastic material such as rubber coming in contact with the surface of the recording head 8 is fixed to the top face 203 side opposed to the recording head 8.

**[0067]** Each of the guide grooves 205 consists of two parallel parts 205a and 205b preceding and following in a direction perpendicular to the nozzle opening face of the recording head 8 and a slope 205c for guiding the projection 198 from one parallel part 205a to the other parallel part 205b when the cap fixing frame 195 moves in the horizontal direction. The cap member support 202 has both sides formed with a shaft 207 engaging a capping means drive mechanism described below.

**[0068]** Figure 19 shows one embodiment of the capping means 180 placed near the home position and the waste ink tank 17, wherein numeral 210 is the above-mentioned capping means drive mechanism rotated in the directions indicated by an arrow 212 by drive means (not shown) with a shaft 211 as the center for moving the capping means 180 between a position at which the capping means 180 is abutted against the recording head 8 and a position at which the capping means 180 is detached from the recording head 8. The shaft 207 of the cap member support 202 is guided by a long groove 213 and a crank 215 rotates, whereby the cap member 183 is moved via a shaft 216 from the position opposed to the recording head 8 to a blade 221 of the waste ink tank 17.

**[0069]** Numeral 17 is the above-mentioned waste ink tank which has an opening 220 in the upper part of the face opposed to the cap member 183, where the blade 221 coming in elastic contact with the projections 184-188 of the cap member 183 is disposed. The waste ink tank 17 contains an ink absorption material 223 described below.

**[0070]** Numeral 224 is a protective member made of an elastic porous substance not producing fiber pieces such as nonwoven cloth. It is housed partitioning a part of the waste ink tank 17 so as to abut the cap member 183 and the blade 206 when the capping means 180 is pulled down to the lowest end. The protective member 224 is impregnated with liquid lacking an affinity for ink, such as silicon oil, as required.

**[0071]** In the embodiment, in the nonprint mode, as shown in Figure 20 (a), the capping means drive mechanism 210 is moved to the recording head 8 side with the cap member support 202 pulled up to the top part by the crank 215 and the projections 184-188 are abutted against the nozzle openings 21B, 21C, 21M, 21Y of the recording head 8, whereby the nozzle openings 21B, 21C, 21M, 21Y are directly sealed by the plane 184a of the cap member 184 without intervention of space, as shown in Figure 22. Even if vibration is applied to the recording head 8 from the outside, unlike a cap formed like a cup, ink drops do not leak from nozzle openings; extremely effective seal means is provided particularly for ink high in film formation property and drying property. Since the rounds 184b, 184c are formed on both sides and the contact area is made as small as possible, the amount of ink remaining between the cap member 183 and the nozzle plate 20 can be lessened as much as possible for preventing ink fixation which causes the cap to be fixed.

**[0072]** To start printing, when a print command signal is input, if the recording head 8 is moved to the print area side with the cap member 183 abutted against the recording head 8, the cap member 183 moves to the print area side as the recording head 8 moves. In this process, the projection 198 of the cap member fixing frame 195 moves from the parallel part 205b of the guide groove 25 via the slope 205c to the parallel part 205a and is detached from the recording head 8. In this state, as shown in Figure 20 (b), the capping means drive mechanism 210 is rotated in the direction of arrow A for detaching the capping means 180 from the recording head 8, whereby the recording head 8 is completely released from the capping means 180, thus enabling ink drops to be spouted through the nozzle openings 21B, 21C, 21M, 21Y; ink drops can be spouted in response to print data.

**[0073]** Upon completion of the printing, the capping means drive mechanism 210 is moved in the direction indicated by arrow B in Figure 20 (b) for moving the abutment piece 200 to a position at which the abutment piece 200 abuts the recording head 8. In this state, when the recording head 8 comes to a position near the capping

13

EP 0 714 778 B1

14

position of the home position, the side of the home position of the recording head 8 abuts the recording head 8 moving in the arrow A direction to the abutment piece 200 (Figure 21 (a)), making a relative move of the fixing frame 195 with the support 202. The fixing frame 195 moves to the parallel part 205b with the projection 198 guided by the slope 205c, and also advances to the recording head side while accurately positioning a horizontal relative position with the recording head 8 at the abutment piece 200, whereby the cap member 183 moves vertically to the nozzle openings as shown by arrow B in the figure 21(b) at the relative rate zero with the recording head 8 for bringing the projections 184-188 into elastic contact with the nozzle openings 21B, 21B, 21C, 21M, 21Y,

**[0074]** Since the horizontal relative rate between the recording head 8 and the cap member 183 is zero just before the abutment, the cap member 183 comes in elastic contact with the nozzle openings 21 without rubbing the recording head unnecessarily.

**[0075]** If the nozzle plate 20 is contaminated with ink dregs, dust, etc., because of long-term use, it needs to be cleaned.

**[0076]** Figure 23 shows one embodiment of the ink absorption material housed in the waste ink tank 17 described above, wherein numerals 230, 230, ... are ink absorption sheets each 0.1 mm to 0.5 mm thick provided by compressing fiber showing an affinity for ink so as to provide a density of about 200 g per cubic meter. A necessary number of sheets are laminated with partition sheets 231, 231, ... made of ink-nonpermeable material, such as a metal foil or resin film, between and an inflow port 232 penetrating the ink absorption material from the top face to the bottom face is made in a position into which waste ink discharged from the recording head 8 flows (in the embodiment, the center of the ink absorption material).

**[0077]** According to the embodiment, when ink discharged from the recording head 8 flows into the inflow port 232 (Figure 24 (a)), it is absorbed in all directions from the bottom face 17a of the waste ink tank 17 and an exposure face 230a of the through hole 232 at the center of the lowest ink absorption sheet 230. Since the current ink absorption sheet 230 absorbing ink is separated from the second ink absorption sheet 230 positioned thereabove by a partition sheet 231, the lowest sheet 230 absorbs waste ink K as much as possible while expelling air from a gap 234, whereby rapid fixation of ink caused by too rapid volatilization of the solvent making up a part of the waste ink can be suppressed for preventing the ink sheet from being clogged with fixed ink; waste ink of an amount near the limit of the absorption capability of one ink sheet can be absorbed.

**[0078]** When the lowest ink absorption sheet 230 thus absorbs ink to the limit, the liquid level of the waste ink rises from the bottom face 17a to the second ink absorption sheet 230 (Figure 24 (b)), and the second ink absorption sheet absorbs waste ink of an amount near the

limit of its absorption capability as described above. Thus, the ink absorption sheet absorbing the waste ink shifts to the upper one in order (Figure 24 (c)).

**[0079]** By the way, if the filling rate with each ink absorption sheet 230 is raised and the peripheral surface comes in contact with a wall face 17b of the waste ink tank 17 and the gap 234 cannot be provided, it is feared that air may remain in the ink absorption sheets 230, blocking spreading of waste ink K in all directions through the inflow port 232. To solve such a problem, vertically continuous notches 235, 235, ... and small through holes 236 are provided on the peripheries of the ink absorption sheets 230 and the partition sheets 231, thereby providing permeability on the fringes of the ink absorption sheets 230.

**[0080]** Figure 25 shows another embodiment of the waste ink absorption material. In the embodiment, only partition sheets 237 not absorbing ink are laminated via spacers 238 so that they are spaced from each other allowing ink to be held by a capillary force, normally 1 mm or less. Numeral 235 is an air vent recess made in the fringes.

**[0081]** According to the embodiment, waste ink flowing in through an inflow port 232 flows into a gap formed by the lowest partition sheet 237 and spreads in all directions and the solvent volatilizes, then only the solid component remains on the partition sheet 237. When one gap is thus filled with the solid component, ink flows into another gap above the gap filled with the solid component and is fixed. This process is repeated for efficiently storing waste ink. Particularly for ink fast in fixation or containing much a solid component, the waste ink absorption material can absorb waste ink more efficiently than the absorption material using compressed fiber.

**[0082]** In the invention, ink is supplied from the ink cartridge via the recording head to the subtank and further during printing, ink in the subtank is made to reversely flow into the ink cartridge via the recording head. Therefore, ink can be circulated on one flow passage and without complicating the ink flow passage, accumulation of ink in the recording head can be removed and bubbles and viscous ink in the flow passage can be discharged for supplying ink at a concentration appropriate for printing to the recording head.

## Claims

1. An ink jet recorder comprising a subtank (10) and an ink jet recording head (8) mounted on a carriage (1) moving in parallel with a platen (4), an ink cartridge (6) being placed outside said carriage (1) for communicating with said ink jet recording head (8) by a tube (7, 9), ink supply means (41) for feeding ink from said ink cartridge (6) into said recording head (8) under pressure, capping means (180) for sealing nozzle openings (21) of said recording head

15

EP 0 714 778 B1

16

(8) outside a print area of said carriage (1), and a waste ink tank (10) for storing waste ink from said recording head (8), characterized in that

said ink jet recording head (8) comprises two common ink chambers (26, 27) communicating with both sides of pressure generating chambers (24) for generating pressure in order to eject ink and ink supply ports (30, 31) where ink flows into said common ink chambers (26, 27) from the outside, one ink supply port (31) being connected to said subtank (10) and the other being connected to said ink cartridge (6), wherein said subtank (10) is replenished with ink through said ink jet recording head (8) by said ink supply means (41) and ink is made to reversely flow into said cartridge (6) via said recording head (8) from said subtank (10) for printing.

2. The ink jet recorder as claimed in claim 1 wherein said ink cartridge comprises a flexible ink bag housed in a sealable vessel and wherein said ink supply means is formed as an air pump for supplying air to said vessel.

3. The ink jet recorder as claimed in claim 1 further including a frame for detachably holding said ink cartridge, a lever rotatably disposed on said holding frame, and an ink supply needle being connected to said recording head by a tube and moving up and down with rotation of said lever.

4. The ink jet recorder as claimed in claim 3 wherein said lever has one end formed with an engagement part engaging when said cartridge is normally mounted, and uses the engagement part as a rotation supporting point.

5. The ink jet recorder as claimed in claim 3 wherein when said ink supply needle is pulled up from said cartridge between said lever and said holding frame, a tip of said ink supply needle is surrounded by an elastic member and when said lever is pulled down, said ink supply needle projects from the elastic member and is inserted into the ink bag.

6. The ink jet recorder as claimed in claim 3 wherein a claw projecting into the side of said ink cartridge is formed on the rotation operation side of said lever, wherein a recess is formed at a position opposed to said claw when said ink supply needle of said cartridge is inserted into the ink bag, and wherein said claw elastically engages said recess in a state in which said ink supply needle is inserted in the ink bag.

7. The ink jet recorder as claimed in claim 1 wherein said subtank is provided with at least a part comprising a flexible film, a responsive piece responsive

to expansion of the flexible film at an ink full position, and a light transmission region at an ink empty position, and wherein a move of said responsive piece and an infrared ray transmission factor of said light transmission region are detected for sensing ink full and ink empty.

8. The ink jet recorder as claimed in claim 7 wherein an ink outlet is disposed in a lower part of said subtank and an air vent hole sealed with a packing lacking an affinity for ink and having permeability is disposed in an upper part of said subtank.

9. The ink jet recorder as claimed in claim 7 wherein said flexible film is airtightly joined to a frame so as to provide a cross section like a ship by turning at an end and said light transmission region is formed near the end.

10. The ink jet recorder as claimed in claim 1 wherein said subtank and said recording head are joined as a unit by a flow passage component, wherein said flow passage component is formed with a flow passage whose part is made up of a groove and a flexible film for sealing the groove, and wherein said subtank and said recording head are connected by the flow passage.

11. The ink jet recorder as claimed in claim 10 wherein a filter is inserted between said recording head and said flow passage component.

12. The ink jet recorder as claimed in claim 2 wherein said ink supply means comprises a base formed with two check valve chambers for housing check valves for suction and exhaust so as to open to one face and an electromagnetic valve chamber communicating with said check valve chamber for exhaust by a groove and housing electromagnetic valves for sealing exhaust ports and an atmosphere communication hole communicating with said electromagnetic valve chamber and having a top face serving as a valve seat, said atmosphere communication hole made in said base, an airtightly provided diaphragm communicating with each check valve chamber at positions opposed to said check valve chambers on an opposed face of said base via through holes and being expanded and shrunk by electromagnetic means, a lid formed with a window in a position opposed to a top face of said atmosphere communication hole serving as the valve seat for sealing the opening of said one face via a packing plate, and a pressure plate for pressing the packing plate via elastic members so as to provide a constant pressure in an area opposed to the window.

13. The ink jet recorder as claimed in claim 12 wherein

17

EP 0 714 778 B1

18

said exhaust ports are connected to space of said cartridge by the flow passage.

14. The ink jet recorder as claimed in claim 12 wherein pressure of the space of said ink cartridge is adjusted by said elastic members to pressure appropriate for supplying ink to said recording head.
15. The ink jet recorder as claimed in claim 1 wherein said capping means is disposed in a non-print area of said carriage and has a cap member made of an elastic substance comprising projections at positions corresponding to nozzle opening rows of said recording head.
16. The ink jet recorder as claimed in claim 15 wherein said elastic substance is made of chemically resistant silicon-family rubber having hardness of JIS hardness 40 to 60, preferably 60.
17. The ink jet recorder as claimed in claim 15 wherein each of said projections is formed so as to have a semicylindrical cross section comprising a plane part abutting the nozzle openings and rounds having a gap length with a nozzle plate outwardly increasing gradually.
18. The ink jet recorder as claimed in claim 15 wherein said capping means is disposed in a capping means drive mechanism so as to move in a direction substantially perpendicular to a face of the nozzle plate and in a direction perpendicular to a move direction of said carriage within a face parallel with a plane containing the nozzle plate.
19. The ink jet recorder as claimed in claim 15 wherein said cap member is disposed in the capping means drive mechanism via a fixing frame movably in a move direction of said recording head and the direction perpendicular to the nozzle plate, and wherein as said recording head moves, said projections are brought into elastic contact with the nozzle openings perpendicularly to the nozzle plate.
20. The ink jet recorder as claimed in claim 19 wherein the fixing frame has an abutment piece abutting a side of said recording head when the nozzle plate of said recording head is opposed to said cap member.
21. The ink jet recorder as claimed in claim 19 wherein a blade opposed to an arrangement direction of the nozzle openings of the nozzle plate is disposed on an upper end of the fixing frame.
22. The ink jet recorder as claimed in claim 1 wherein said waste ink tank for storing ink discharged from said recording head is disposed in the non-print ar-

ea of said carriage and contains ink absorption material having a plurality of layer-like ink absorption regions separated up and down from each other by ink non-transmission material.

23. The ink jet recorder as claimed in claim 22 wherein the ink absorption regions are filled with porous material.
24. The ink jet recorder as claimed in claim 22 wherein the ink absorption regions are formed as a gap allowing ink to be held by a surface tension.
25. The ink jet recorder as claimed in claim 22 wherein an ink inflow port is made in the ink absorption material from the top to bottom.
26. The ink jet recorder as claimed in claim 22 wherein a recess forming a space with a wall face of said waste ink tank or a through hole is made in fringes of the ink absorption material.
27. The ink jet recorder as claimed in claim 22 wherein said waste ink tank is formed with an opening in an upper area opposed to said cap member and wherein the opening is provided with a blade with which said cap member comes in contact when said cap member is dropped by said capping means drive mechanism.
28. The ink jet recorder as claimed in claim 27 wherein a cap protective member abutting said cap member is disposed in an upper part of said blade.
29. The ink jet recorder as claimed in claim 28 wherein said cap protective member is impregnated with an ink repellent.

#### Patentansprüche

1. Tintenstrahlaufzeichnungsvorrichtung mit einem Sekundärbehälter (10) und einem Tintenstrahlaufzeichnungskopf (8), der auf einem sich parallel zu einer Walze (4) bewegendem Schlitten (1) angebracht ist, einer Tintenpatrone (6), die außerhalb des Schlittens (1) angeordnet ist und mit dem Tintenstrahlaufzeichnungskopf (8) mittels eines Rohrs (7,9) kommuniziert, einem Tintenzuführmittel (41) für die Zufuhr von Tinte von der Tintenpatrone (6) zum Aufzeichnungskopf (8) unter Druck, einem Kappenmittel (180) zum Abdichten von Düsenöffnungen (21) des Aufzeichnungskopfs (8) außerhalb eines Druckbereichs des Schlittens (1) sowie einem Resttintenbehälter (10) zur Aufnahme von Resttinte aus dem Aufzeichnungskopf (8), dadurch gekennzeichnet, daß der Tintenstrahlaufzeichnungskopf (8) zwei ge-

- meinsame Tintenkammern (26,27) aufweist, die mit beiden Seiten von zur Erzeugung von Druck für den Ausstoß von Tinte dienenden Druckerzeugungskammern (24) kommunizieren, sowie Tintenzuführöffnungen (30, 31), durch die Tinte in die gemeinsamen Tintenkammern (26,27) von außen fließt, wobei eine Tintenzuführöffnung (31) mit dem Sekundärbehälter (10) verbunden ist und die andere mit der Tintenpatrone (6) verbunden ist, wobei der Sekundärbehälter (10) mit Tinte über den Tintenstrahlaufzeichnungskopf (8) durch das Tintenzuführmittel (41) aufgefüllt wird und Tinte dazu veranlaßt wird, umgekehrt aus dem Sekundärbehälter (10) in die Tintenpatrone (6) über den Aufzeichnungskopf (8) für das Drucken zu fließen.
2. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, bei der die Tintenpatrone einen in einem verschließbaren Behälter befindlichen flexiblen Tintenbeutel aufweist, wobei das Tintenzuführmittel als eine Luftpumpe ausgebildet ist, um dem Behälter Luft zuzuführen.
  3. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, die des weiteren einen Rahmen zur lösbaren Halterung der Tintenpatrone, einen drehbar an dem Halterahmen angeordneten Hebel sowie eine Tintenzuführnadel aufweist, die mit dem Aufzeichnungskopf mittels eines Schlauchs verbunden ist und sich entsprechend der Drehung des Hebels aufwärts und abwärts bewegt.
  4. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 3, bei der ein Ende des Hebels mit einem Eingriffsabschnitt ausgebildet ist, der bei normaler Anbringung der Patrone eingerückt ist, wobei der Eingriffsabschnitt als ein Drehunterstützungspunkt verwendet wird.
  5. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 3, bei der, wenn die Tintenzuführnadel von der Patrone zwischen dem Hebel und dem Halterahmen nach oben gezogen wird, eine Spitze der Tintenzuführnadel von einem elastischen Element umgeben ist und, wenn der Hebel nach unten gezogen wird, die Tintenzuführnadel aus dem elastischen Element hervorragt und in den Tintenbeutel eingeführt ist.
  6. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 3, bei der eine Klaue, die seitlich in die Tintenpatrone hineinragt, auf der Drehbetriebsseite des Hebels ausgebildet ist, wobei eine Vertiefung an einer der Klaue entgegengesetzten Position gebildet ist, wenn die Tintenzuführnadel der Patrone in den Tintenbeutel eingeführt ist, und wobei die Klaue elastisch in die Vertiefung in einem Zustand eingreift, in dem die Tintenzuführnadel in den Tintenbeutel eingeführt ist.
  7. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, bei der der Sekundärbehälter wenigstens einen eine flexible Folie aufweisenden Abschnitt, ein Reaktionselement, das auf die Expansion der flexiblen Folie in einer mit Tinte gefüllten Position reagiert, sowie einen lichtdurchlässigen Bereich in einer Position, in der keine Tinte vorhanden ist, aufweisen, wobei eine Bewegung des Reaktionselements und ein Infrarotdurchlässigkeitsfaktor des lichtdurchlässigen Bereichs erfaßt werden zur Ermittlung, ob ein mit Tinte gefüllter Zustand oder ein leerer Zustand herrscht.
  8. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 7, bei der ein Tintenauslaß in einem unteren Abschnitt des Sekundärbehälters angeordnet ist und ein Lüftungsloch, das mit einer Dichtung abgedichtet ist, die keine Affinität zur Tinte aufweist und eine Durchlässigkeit aufweist, in einem oberen Abschnitt des Sekundärbehälters angeordnet ist.
  9. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 7, bei der die flexible Folie luftdicht mit einem Rahmen derart verbunden ist, daß ein schiffartiger Querschnitt durch Drehung an einem Ende ausgebildet ist und der lichtdurchlässige Bereich nahe am Ende ausgebildet ist.
  10. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, bei der der Sekundärbehälter und der Aufzeichnungskopf zu einer Einheit mittels einer Fließdurchgangskomponente ausgebildet sind, wobei die Fließdurchgangskomponente als Fließdurchgang ausgebildet ist, der aus einer Nut und einer flexiblen Folie zur Abdichtung der Nut gebildet ist, und wobei der Sekundärbehälter und der Aufzeichnungskopf über den Fließdurchgang verbunden sind.
  11. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 10, bei der ein Filter zwischen dem Aufzeichnungskopf und der Fließdurchgangskomponente eingesetzt ist.
  12. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 2, bei der das Tintenzuführmittel eine Basis umfaßt, die zwei Absperrventilkammern zur Aufnahme von Absperrventilen zum Ansaugen und Ablassen aufweist, um eine Öffnung zu einer Fläche zu ermöglichen, sowie eine Elektromagnetventilkammer, die mit der Absperrventilkammer zum Ablassen mittels einer Nut kommuniziert und elektromagnetische Ventile zur Abdichtung von Ablaßöffnungen aufnimmt, sowie ein Umgebungsluftverbindungsloch, das mit der Elektromagnetventilkammer kommuniziert und eine obere Fläche aufweist, die

- als ein Ventilsitz dient, wobei das Umgebungsluftverbindungsloch in der Basis ausgebildet ist und eine luftdicht ausgebildete Membran mit jeder Absperrventilkammer an den Absperrventilkammern entgegengesetzten Positionen an einer entgegengesetzten Fläche der Basis über Durchgangslöcher kommuniziert und mittels eines elektromagnetischen Mittels ausgedehnt und zusammengezogen wird, wobei ein Deckel, der mit einem Fenster an einer der oberen Fläche des Umgebungsluftverbindungslochs entgegengesetzten Position ausgebildet ist, als Ventilsitz zur Abdichtung der Öffnung der einen Fläche über eine Dichtungsplatte dient, und eine Druckplatte zur Komprimierung der Dichtungsplatte über elastische Elemente vorgesehen ist, um einen konstanten Druck in einem dem Fenster entgegengesetzten Bereich bereitzustellen.
13. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 12, bei der die Absaugöffnungen mit einem Raum der Patrone über den Fließdurchgang verbunden sind.
14. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 12, bei der der Druck des Raums der Tintenpatrone durch das elastische Element derart eingestellt ist, daß ein für die Zufuhr von Tinte zu dem Aufzeichnungskopf geeigneter Druck herrscht.
15. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, bei der das Kappenmittel in einem Bereich der Patrone angeordnet ist, in dem nicht gedruckt wird, und ein Kappenelement aufweist, das aus einer elastischen Substanz hergestellt ist und Vorsprünge an Positionen aufweist, die Düsenöffnungsreihen des Aufzeichnungskopfs entsprechen.
16. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15, bei der es sich bei der elastischen Substanz um Gummi aus der Gruppe der chemikalienfesten Silikone handelt, die eine JIS-Härte von 40 bis 60, vorzugsweise 60, aufweist.
17. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15, bei der jeder Vorsprung derart ausgebildet ist, daß er einen halbzylindrischen Querschnitt aufweist mit einem ebenen Abschnitt, der an den Düsenöffnungen anliegt und Rundungen, die eine Spalllänge aufweisen, wobei eine Düsenplatte sich nach außen schrittweise erweitert.
18. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15, bei der das Kappenmittel in einem Kappenmittelantriebsmechanismus derart angeordnet ist, daß es sich in eine Richtung bewegt, die sich im wesentlichen senkrecht zu einer Fläche der Düsenplatte erstreckt, sowie in eine Richtung, die sich senkrecht zu einer Bewegungsrichtung der Patrone innerhalb einer Fläche erstreckt, die parallel zu einer die Düsenplatte umfassenden Ebene gerichtet ist.
19. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15, bei der das Kappenelement in dem Kappenmittelantriebsmechanismus mittels eines Befestigungsrahmens angeordnet ist, der in einer Bewegungsrichtung des Aufzeichnungskopfs und in einer sich senkrecht zur Düsenplatte erstreckenden Richtung bewegbar ist, wobei während der Bewegung des Aufzeichnungskopfs die Vorsprünge in elastischen Kontakt mit den Düsenöffnungen senkrecht zu der Düsenplatte gebracht werden.
20. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 19, bei der der Befestigungsrahmen ein Anlagestück aufweist, das an einer Seite des Aufzeichnungskopfs anliegt, wenn die Düsenplatte des Aufzeichnungskopfs sich entgegengesetzt zu dem Kappenelement befindet.
21. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 19, bei der eine Klinge, die entgegengesetzt zu einer Anordnungsrichtung der Düsenöffnungen der Düsenplatte angeordnet ist, an einem oberen Ende des Befestigungsrahmens positioniert ist.
22. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, bei der der Resttintenbehälter zur Aufnahme von Tinte, die von dem Aufzeichnungskopf abgegeben wird, in dem Bereich der Patrone angeordnet ist, in dem nicht gedruckt wird, und ein Tintenabsorptionsmaterial aufweist, das eine Mehrzahl von schichtartigen Tintenabsorptionsbereichen enthält, die nach oben und unten mittels eines tintenundurchlässigen Materials voneinander getrennt sind.
23. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22, bei der die Tintenabsorptionsbereiche mit porösem Material gefüllt sind.
24. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22, bei der die Tintenabsorptionsbereiche als ein Spalt ausgebildet sind, der es ermöglicht, daß Tinte durch Oberflächenspannung gehalten wird.
25. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22, bei der eine Tinteneinlaßöffnung von oben bis unten aus dem Tintenabsorptionsmaterial gebildet ist.
26. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22, bei der eine Vertiefung, die einen Raum mit einer Wandfläche des Resttintenbehälters oder

23

EP 0 714 778 B1

24

einem Durchgangsloch bildet, an den Rändern des Tintenabsorptionsmaterials gebildet ist.

27. Tintenstrahlaufzeichnungs Vorrichtung gemäß Anspruch 22, bei der der Resttintenbehälter mit einer Öffnung in einem oberen Bereich ausgebildet ist, der entgegengesetzt zu dem Kappenelement ausgebildet ist, wobei die Öffnung mit einer Klinge versehen ist, mit der das Kappenelement in Kontakt gelangt, wenn das Kappenelement mittels des Kappenelementantriebsmechanismus abgesenkt wird.

28. Tintenstrahlaufzeichnungs Vorrichtung gemäß Anspruch 27, bei der ein Kappenschutzelement, das an dem Kappenelement anliegt, in einem oberen Abschnitt der Klinge angeordnet ist.

29. Tintenstrahlaufzeichnungs Vorrichtung gemäß Anspruch 28, bei dem das Kappenschutzelement mit einer tintenabweisenden Substanz imprägniert ist.

#### Revendications

1. Appareil d'enregistrement à jets d'encre comprenant un réservoir auxiliaire (10) et une tête (8) d'enregistrement à jets d'encre montés sur un chariot (1) qui se déplace parallèlement à un rouleau d'impression (4), une cartouche d'encre (6) placée à l'extérieur du chariot (1) afin qu'elle communique avec la tête (8) d'enregistrement à jets d'encre par un tube (7, 9), un dispositif (41) de transmission d'encre destiné à transmettre de l'encre de la cartouche d'encre (6) à la tête d'enregistrement (8) sous pression, un dispositif à capuchon (180) destiné à fermer de manière étanche les ouvertures de buses (21) de la tête d'enregistrement (8) en dehors d'une zone d'impression du chariot (1), et un réservoir d'encre usée (10) destiné à contenir l'encre usée provenant de la tête (8) d'enregistrement, caractérisé en ce que

la tête (8) d'enregistrement à jets d'encre comprend deux chambres communes d'encre (26, 27) qui communiquent avec les deux côtés de chambres génératrices de pression (24) destinées à créer une pression de projection de l'encre, et les canaux (30, 31) de transmission d'encre dans lesquels l'encre circule vers les chambres communes d'encre (26, 27) depuis l'extérieur, un premier canal (31) de transmission d'encre étant raccordé au réservoir auxiliaire (10) et l'autre étant raccordé à la cartouche d'encre (6), dans lequel le réservoir auxiliaire (10) est rempli d'encre par l'intermédiaire de la tête (8) d'enregistrement à jets d'encre à l'aide du dispositif (41) de transmission d'encre et l'encre circule en sens inverse vers la cartouche (6) par l'intermédiaire de la tête (8) d'enregistrement depuis le réservoir auxiliaire (10) pour l'impression.

2. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel la cartouche d'encre comprend un sac souple d'encre logé dans une cuve qui peut être fermée de manière étanche, et le dispositif de transmission d'encre est formé d'une pompe pneumatique destinée à transmettre de l'air à la cuve.

3. Appareil d'enregistrement à jets d'encre selon la revendication 1, comprenant en outre un cadre de support amovible de la cartouche d'encre, un levier disposé afin qu'il puisse tourner sur le cadre de support, et une aiguille de transmission d'encre reliée à la tête d'enregistrement par un tube et se déplaçant verticalement lors de la rotation du levier.

4. Appareil d'enregistrement à jets d'encre selon la revendication 3, dans lequel le levier a une première extrémité possédant une partie de coopération qui coopère lorsque la cartouche est normalement montée, et qui utilise la partie de coopération comme point de support de rotation.

5. Appareil d'enregistrement à jets d'encre selon la revendication 3, dans lequel, lorsque l'aiguille de transmission d'encre est tirée vers le haut par rapport à la cartouche entre le levier et le cadre de support, un bout de l'aiguille est entouré par un organe élastique, et lorsque le levier est tiré vers le bas, l'aiguille de transmission d'encre dépasse de l'organe élastique et pénètre dans le sac d'encre.

6. Appareil d'enregistrement à jets d'encre selon la revendication 3, dans lequel une griffe dépassant du côté de la cartouche d'encre est formée du côté de manoeuvre de rotation du levier, et une cavité est formée à un emplacement opposé à la grille lorsque l'aiguille de transmission d'encre de la cartouche est insérée dans le sac d'encre, et la griffe coopère élastiquement avec la cavité lorsque l'aiguille de transmission d'encre est insérée dans le sac d'encre.

7. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel le réservoir auxiliaire a au moins une partie comprenant un film souple, une pièce sensible à la dilatation du film souple à une position d'état plein d'encre, et une région de transmission de lumière à une position sans encre, et le déplacement de la pièce sensible et le facteur de transmission des rayons infrarouges de la région de transmission de lumière sont déterminés pour la détection de l'état plein d'encre et de l'état vide.

8. Appareil d'enregistrement à jets d'encre selon la revendication 7, dans lequel une sortie d'encre est placée dans une partie inférieure du réservoir auxiliaire et un trou de ventilation fermé de manière

25

EP 0 714 778 B1

26

étanche par une garniture qui n'a pas d'affinité pour l'encre et qui possède une perméabilité est disposé à une partie supérieure du réservoir auxiliaire.


9. Appareil d'enregistrement à jets d'encre selon la revendication 7, dans lequel le film souple est raccordé de manière hermétique à un cadre afin qu'il donne une section en forme de bateau par retournement à une extrémité et la région de transition de lumière est formée près de l'extrémité.
10. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel le réservoir auxiliaire et la tête d'enregistrement sont raccordés comme un tout par un élément à passages de circulation, et cet élément a un passage de circulation dont une partie est constituée d'une gorge et un film souple destiné à fermer de manière étanche la gorge, et le réservoir auxiliaire et la tête d'enregistrement sont raccordés par le passage de circulation.
11. Appareil d'enregistrement à jets d'encre selon la revendication 10, dans lequel un filtre est inséré entre la tête d'enregistrement et l'élément à passage de circulation.
12. Appareil d'enregistrement à jets d'encre selon la revendication 2, dans lequel le dispositif de transmission d'encre comporte une base formée avec deux chambres de clapet destinées à loger des clapets d'aspiration et d'évacuation afin qu'elles débouchent vers une face, et une chambre d'électrovannes communiquant avec la chambre de clapet pour l'évacuation par une gorge et logeant des électrovannes destinées à fermer de manière étanche les canaux d'évacuation, et un trou de communication atmosphérique communiquant avec la chambre d'électrovannes et ayant une face supérieure utilisée comme siège de soupape, le trou de communication atmosphérique étant formé dans la base, un diaphragme communiquant de manière hermétique avec chaque chambre de clapet à des positions opposées aux chambres de clapet à une face opposée de la base par l'intermédiaire de trous débouchants et étant dilaté et rétréci par un dispositif électromagnétique, un couvercle formé avec une fenêtre occupant une position opposée à une face supérieure du trou de communication atmosphérique utilisé comme siège de soupape pour la fermeture étanche de l'ouverture de la première face à l'aide d'une plaque à garniture, et une plaque de pression destinée à repousser la plaque de garniture par l'intermédiaire d'organes élastiques afin qu'une pression constante soit appliquée dans une zone opposée à la fenêtre.
13. Appareil d'enregistrement à jets d'encre selon la revendication 12, dans lequel les canaux d'évacua-

tion sont raccordés à l'espace de la cartouche par le passage de circulation.

14. Appareil d'enregistrement à jets d'encre selon la revendication 12, dans lequel la pression de l'espace de la cartouche d'encre est ajustée par les organes élastiques à une pression convenant à la transmission de l'encre à la tête d'enregistrement.
15. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel le dispositif à capuchon est placé dans une zone sans impression du chariot et a un organe à capuchon constitué d'une substance élastique ayant des saillies à des positions qui correspondent aux rangées d'ouvertures de buses de la tête d'enregistrement.
16. Appareil d'enregistrement à jets d'encre selon la revendication 15, dans lequel la substance élastique est formée d'un caoutchouc de la famille des silicones, résistant chimiquement et ayant une dureté JIS de 40 à 60, de préférence de 60.
17. Appareil d'enregistrement à jets d'encre selon la revendication 15, dans lequel chacune des saillies est formée avec une section hémicylindrique comprenant une partie plane en butée contre les ouvertures de buses et des parties arrondies ayant une longueur d'espacement par rapport à une plaque à buses qui augmente progressivement vers l'extérieur.
18. Appareil d'enregistrement à jets d'encre selon la revendication 15, dans lequel le dispositif à capuchon est placé dans un mécanisme d'entraînement du dispositif à capuchon afin qu'il se déplace en direction pratiquement perpendiculaire à une face de la plaque à buses et en direction perpendiculaire à une direction de déplacement du chariot dans une face parallèle à un plan contenant la plaque à buses.
19. Appareil d'enregistrement à jets d'encre selon la revendication 15, dans lequel l'organe à capuchon est disposé dans un mécanisme d'entraînement de dispositif à capuchon avec un cadre de fixation mobile dans une direction de déplacement de la tête d'enregistrement et en direction perpendiculaire à la plaque à buses, et, lorsque la tête d'enregistrement se déplace, les saillies sont mises en contact élastique avec les ouvertures de buses perpendiculairement à la plaque à buses.
20. Appareil d'enregistrement à jets d'encre selon la revendication 19, dans lequel le cadre de fixation a une pièce de butée qui est en butée contre un côté de la tête d'enregistrement lorsque la plaque à buses de la tête d'enregistrement est en face de l'organe à capuchon.


21. Appareil d'enregistrement à jets d'encre selon la revendication 19, dans lequel une lame opposée à une direction de disposition des ouvertures de buses dans la plaque à buses est disposée sur une extrémité supérieure du cadre de fixation. 5
22. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel le réservoir d'encre usée destiné à contenir l'encre évacuée de la tête d'enregistrement est placé dans une zone sans impression du chariot et contient un matériau d'absorption d'encre ayant plusieurs régions d'absorption d'encre en forme de couches séparées verticalement les unes des autres par un matériau ne transmettant pas l'encre. 10 15
23. Appareil d'enregistrement à jets d'encre selon la revendication 22, dans lequel les régions d'absorption d'encre sont remplies d'un matériau poreux. 20
24. Appareil d'enregistrement à jets d'encre selon la revendication 22, dans lequel les régions d'absorption d'encre sont formées par un espace permettant la retenue de l'encre par les forces de tension superficielle. 25
25. Appareil d'enregistrement à jets d'encre selon la revendication 22, dans lequel un canal d'entrée d'encre est formé dans le matériau d'absorption d'encre du haut en bas. 30
26. Appareil d'enregistrement à jets d'encre selon la revendication 22, dans lequel une cavité formant un espace avec une face de paroi du réservoir d'encre usée ou un trou débouchant est formé aux franges du matériau d'absorption d'encre. 35
27. Appareil d'enregistrement à jets d'encre selon la revendication 22, dans lequel le réservoir d'encre usée est formé avec une ouverture dans une zone supérieure opposée à l'organe à capuchon, et l'ouverture a une lame avec laquelle l'organe à capuchon vient en contact lorsque l'organe à capuchon est abaissé par le mécanisme d'entraînement du dispositif à capuchon. 40 45
28. Appareil d'enregistrement à jets d'encre selon la revendication 27, dans lequel un organe protecteur de capuchon en butée contre l'organe à capuchon est disposé à une partie supérieure de la lame. 50
29. Appareil d'enregistrement à jets d'encre selon la revendication 28, dans lequel l'organe protecteur de capuchon est imprégné d'une matière à répulsion d'encre. 55

FIG. 1

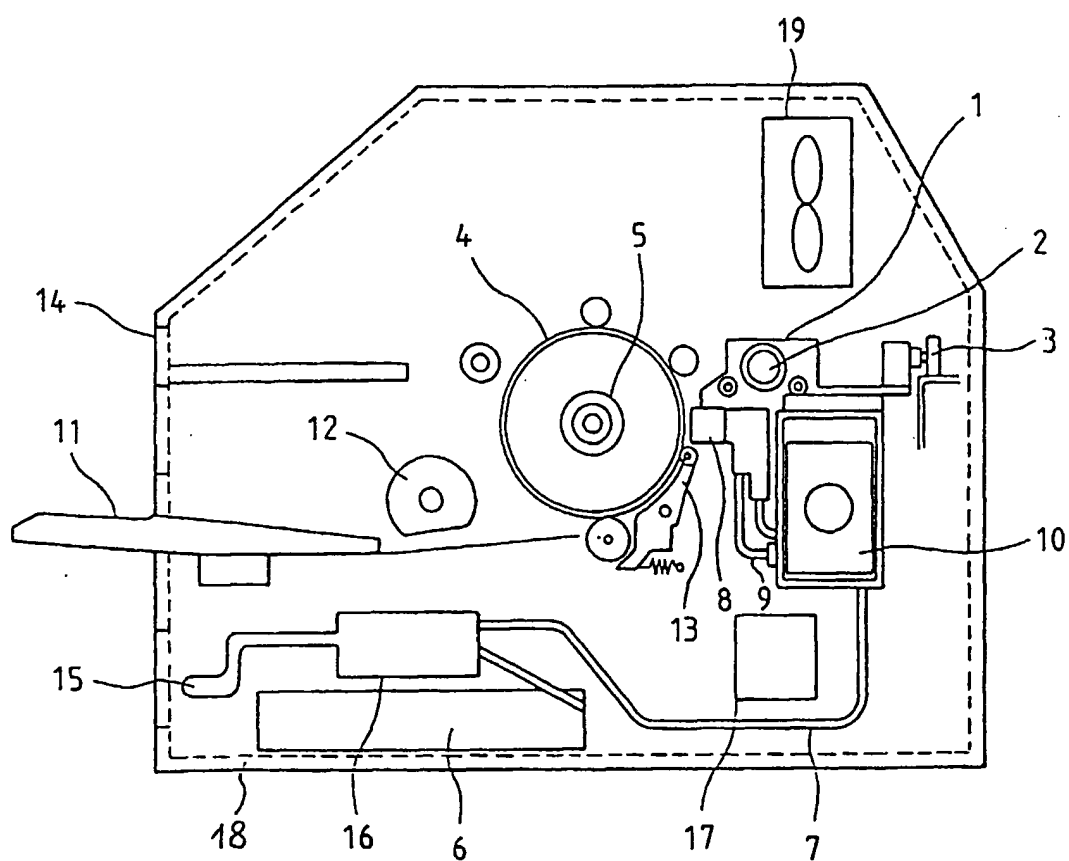


EP 0 714 778 B1

FIG. 2

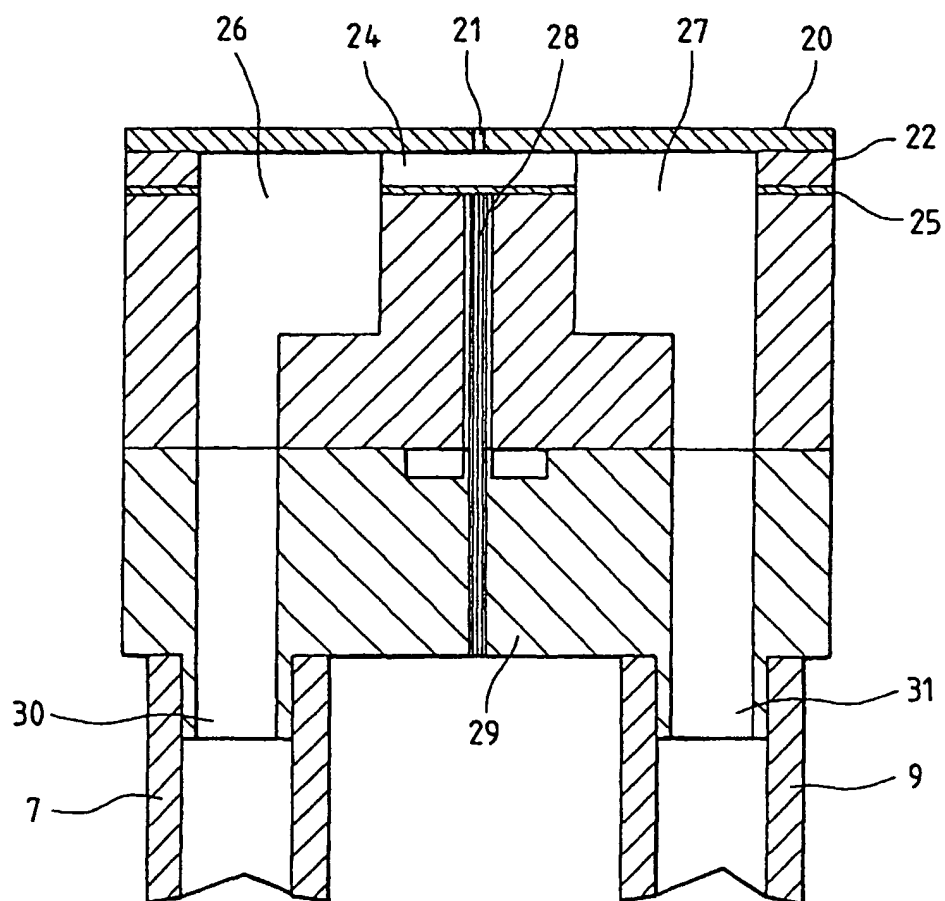


EP 0 714 778 B1

FIG. 3

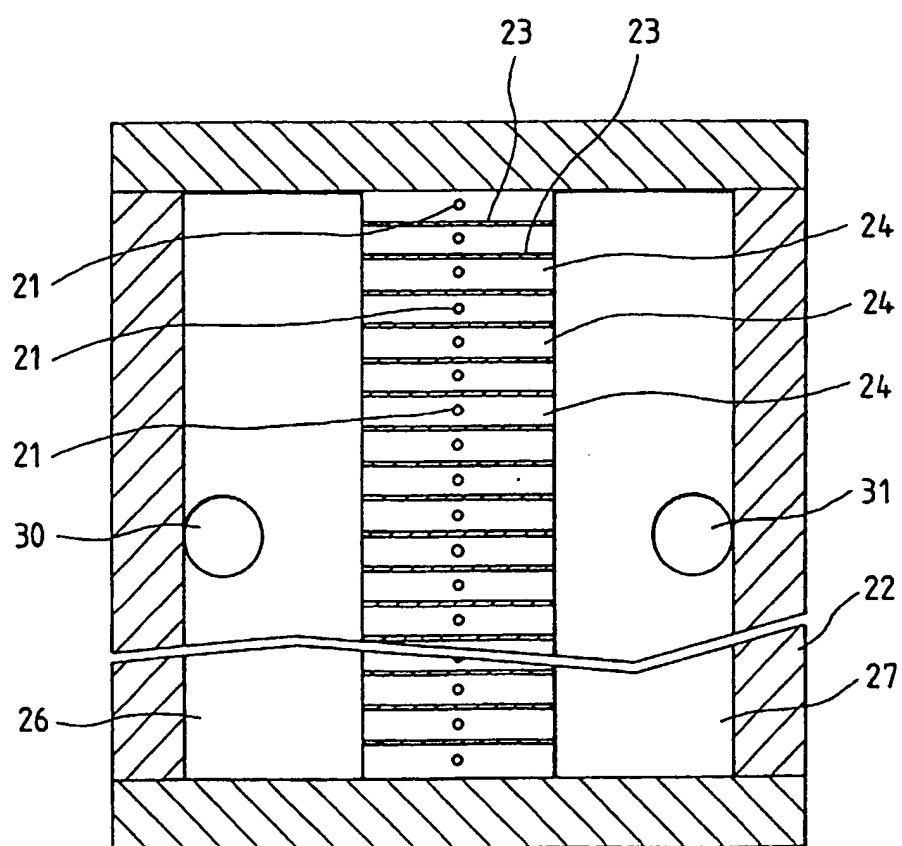


EP 0 714 778 B1

FIG. 4

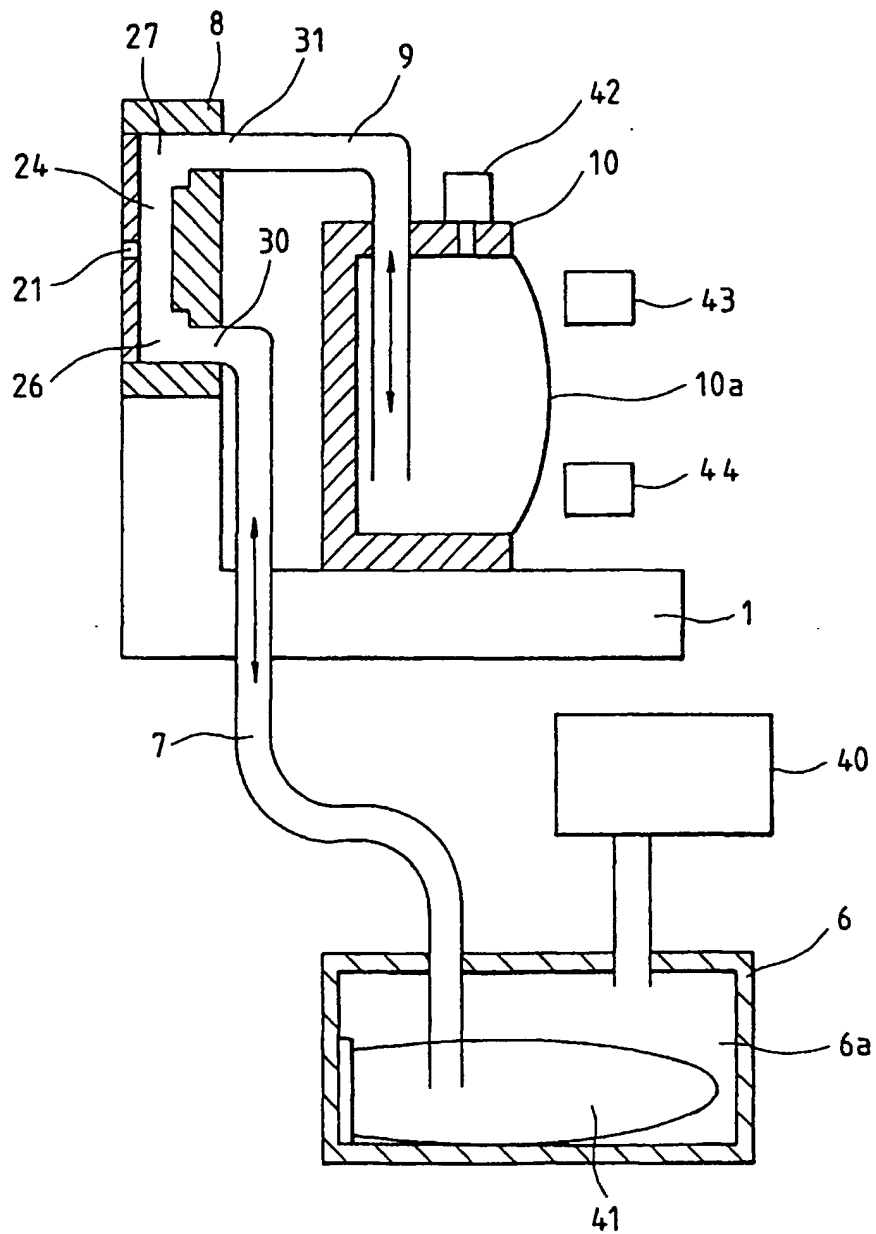

EP 0 714 778 B1

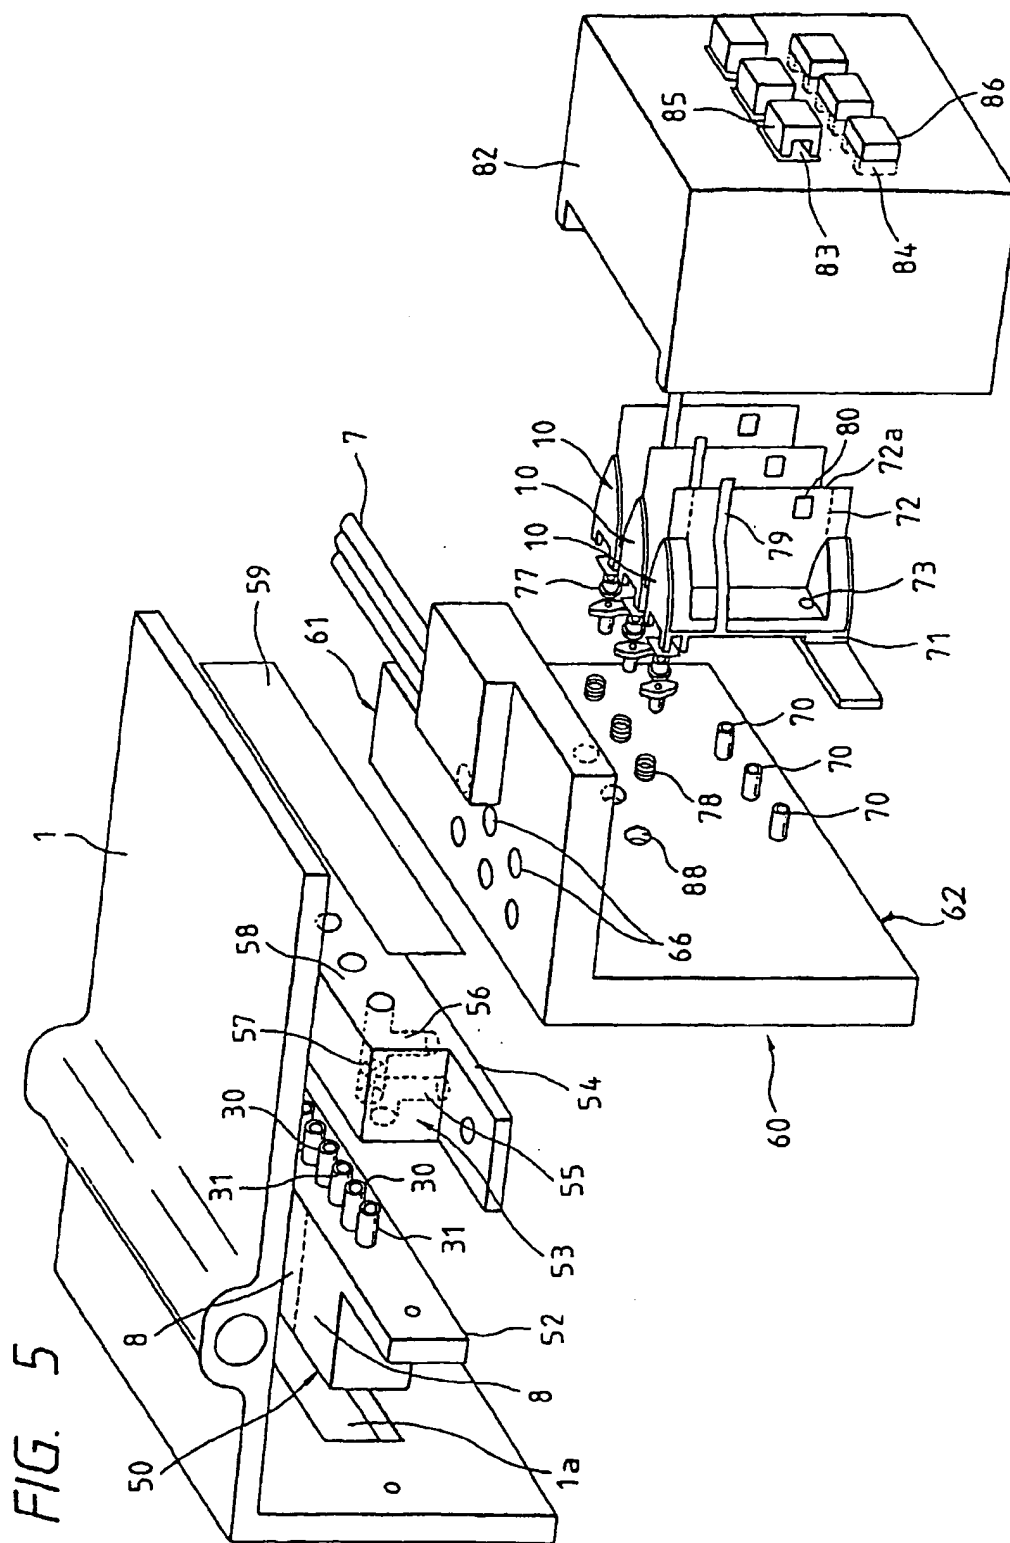

EP 0 714 778 B1

FIG. 6


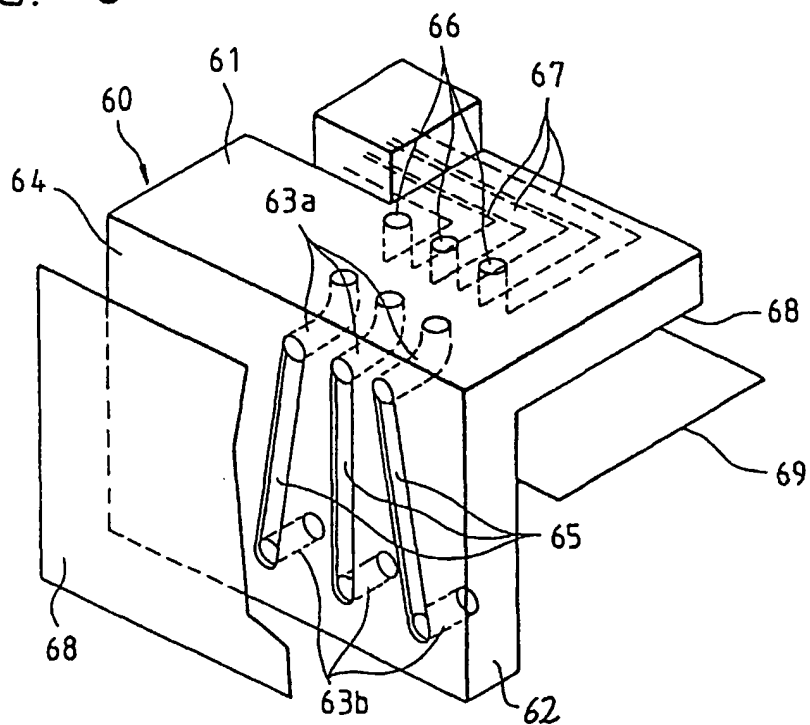


FIG. 7

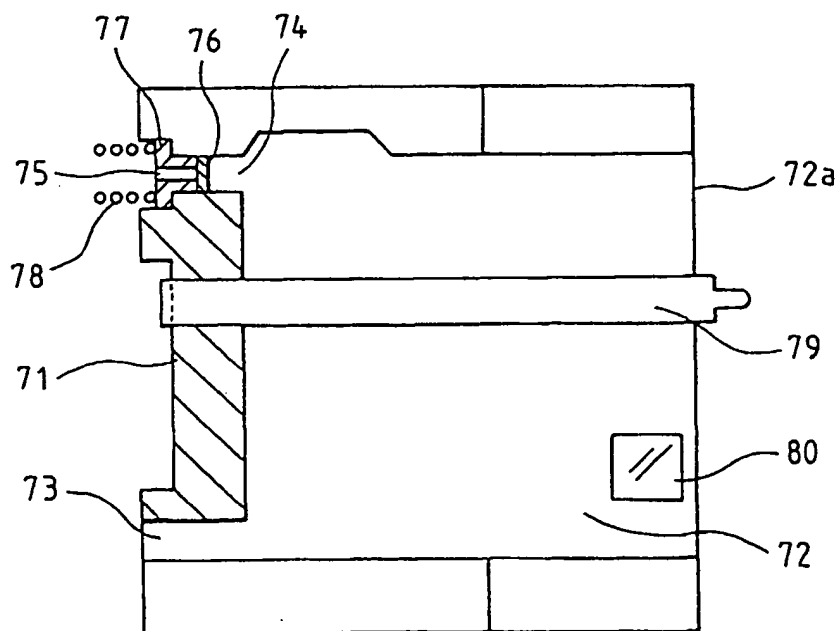

**EP 0 714 778 B1**

FIG. 8


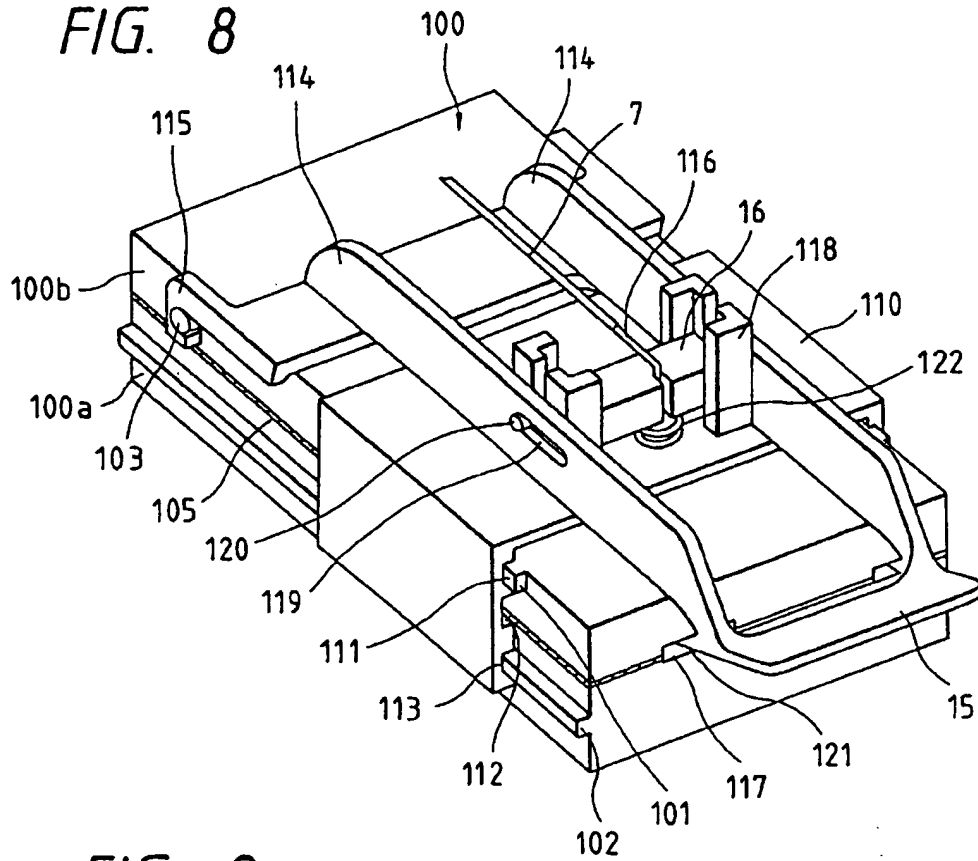


FIG. 9

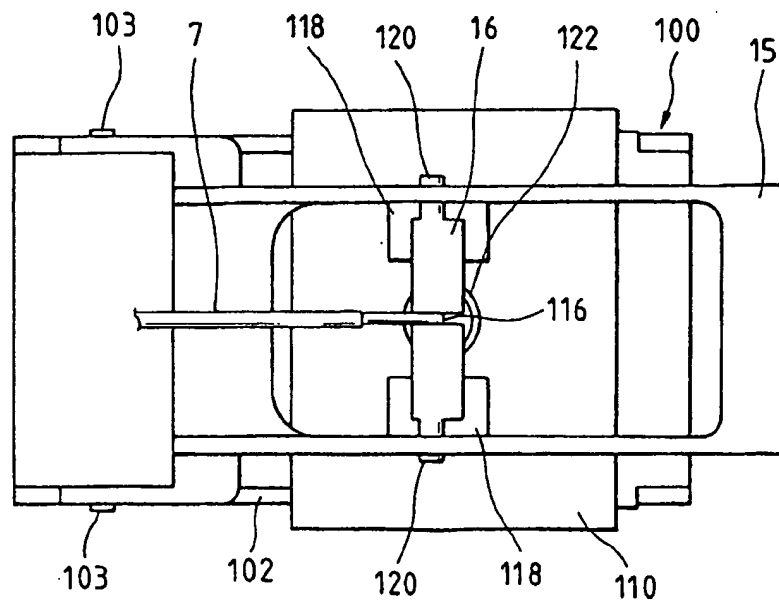

EP 0 714 778 B1

FIG. 10


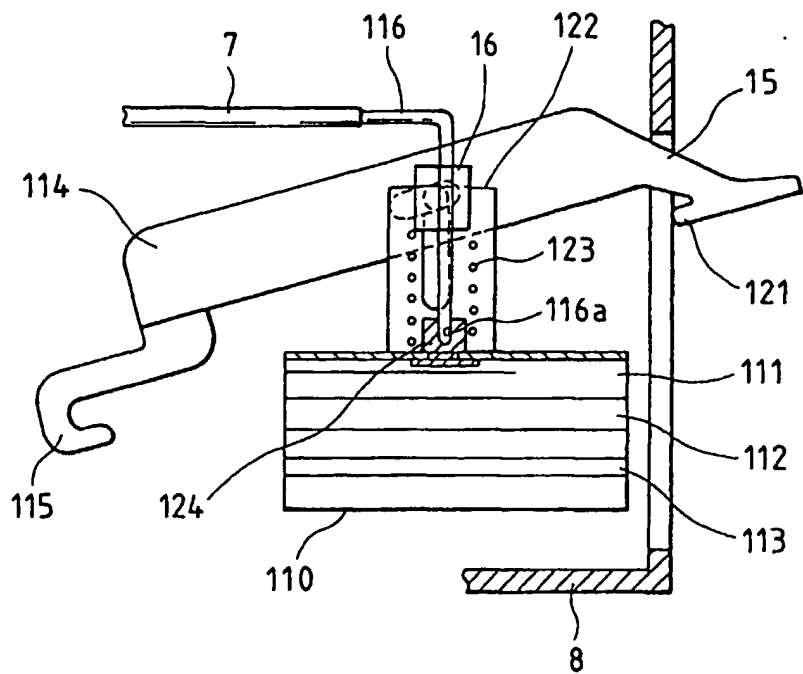


FIG. 11

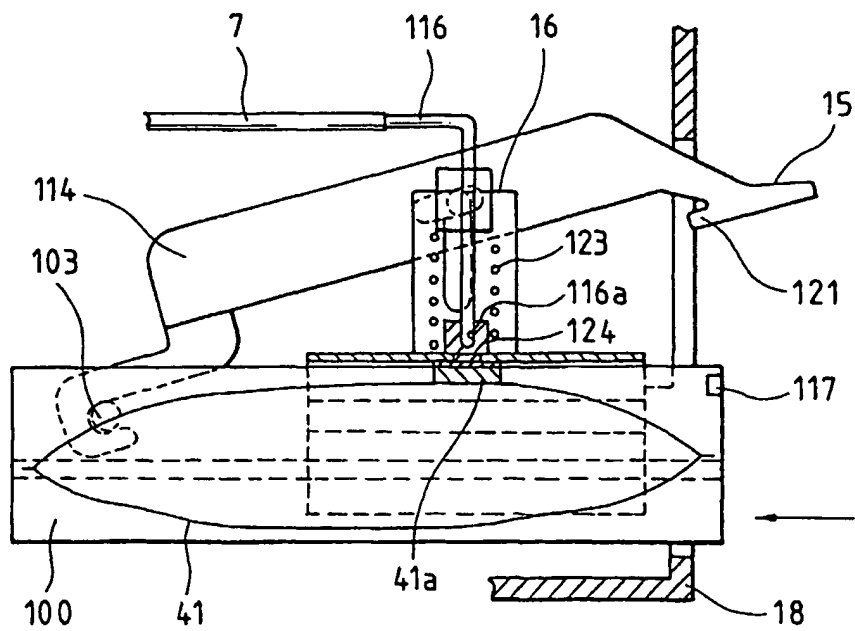

EP 0 714 778 B1

FIG. 12

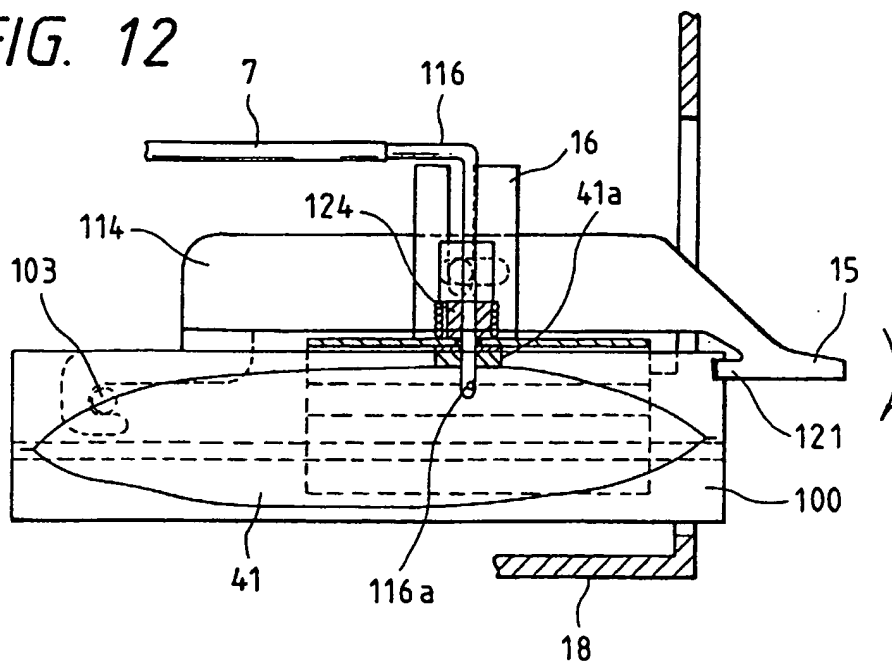


FIG. 13


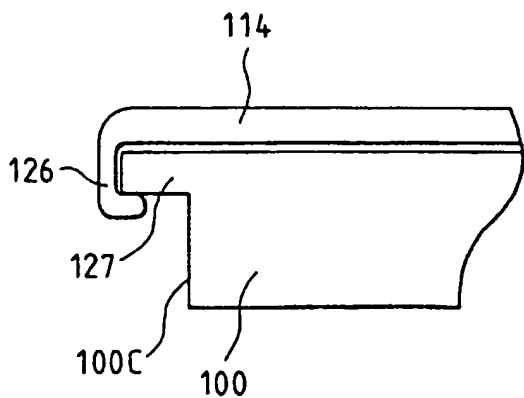


FIG. 14

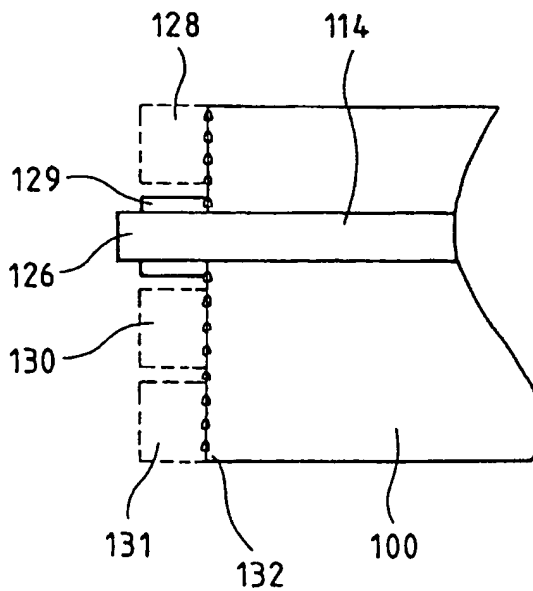

EP 0 714 778 B1

FIG. 15(a)


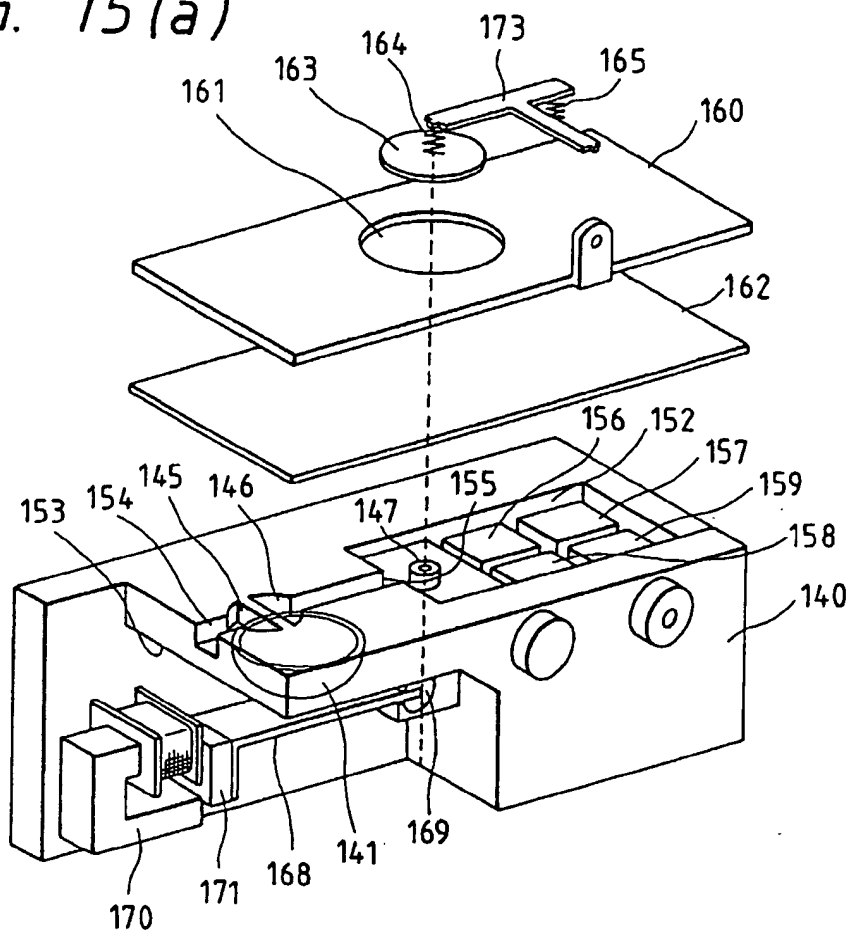


FIG. 15(b)

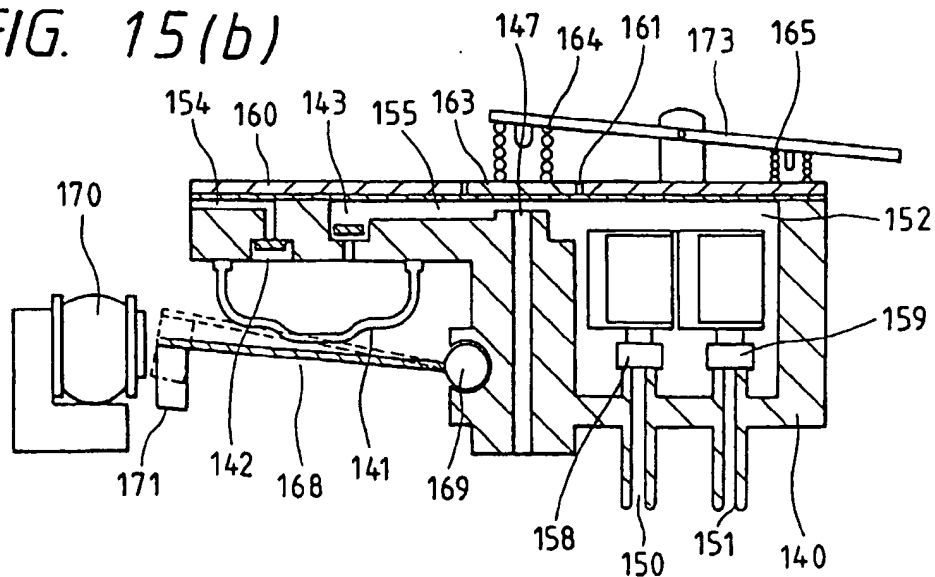

EP 0 714 778 B1

FIG. 16



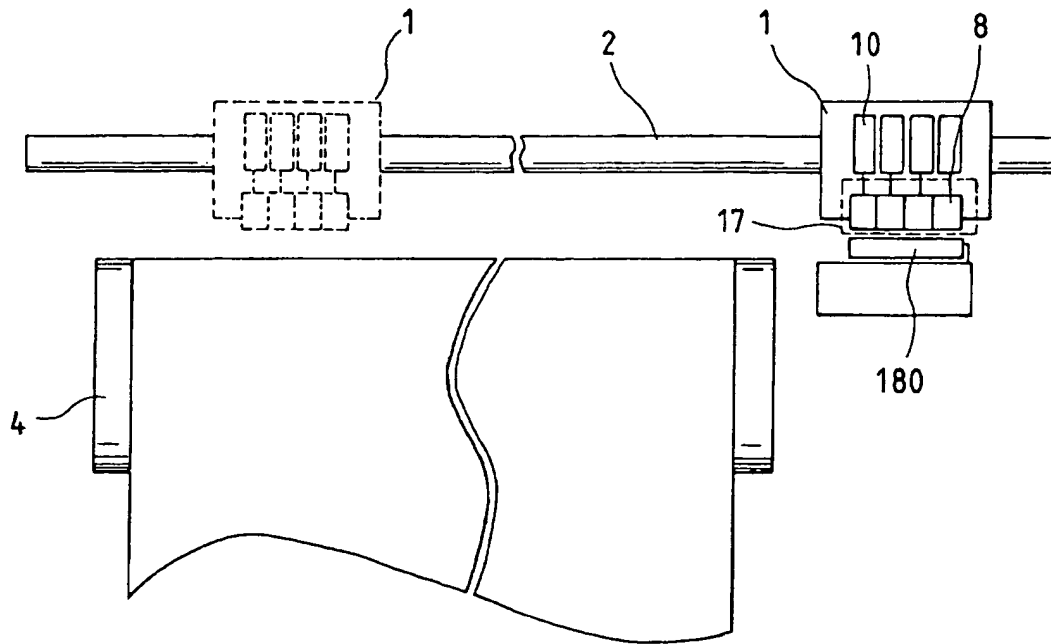


FIG. 18

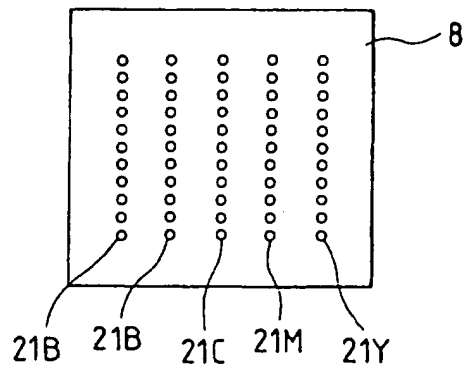

EP 0 714 778 B1

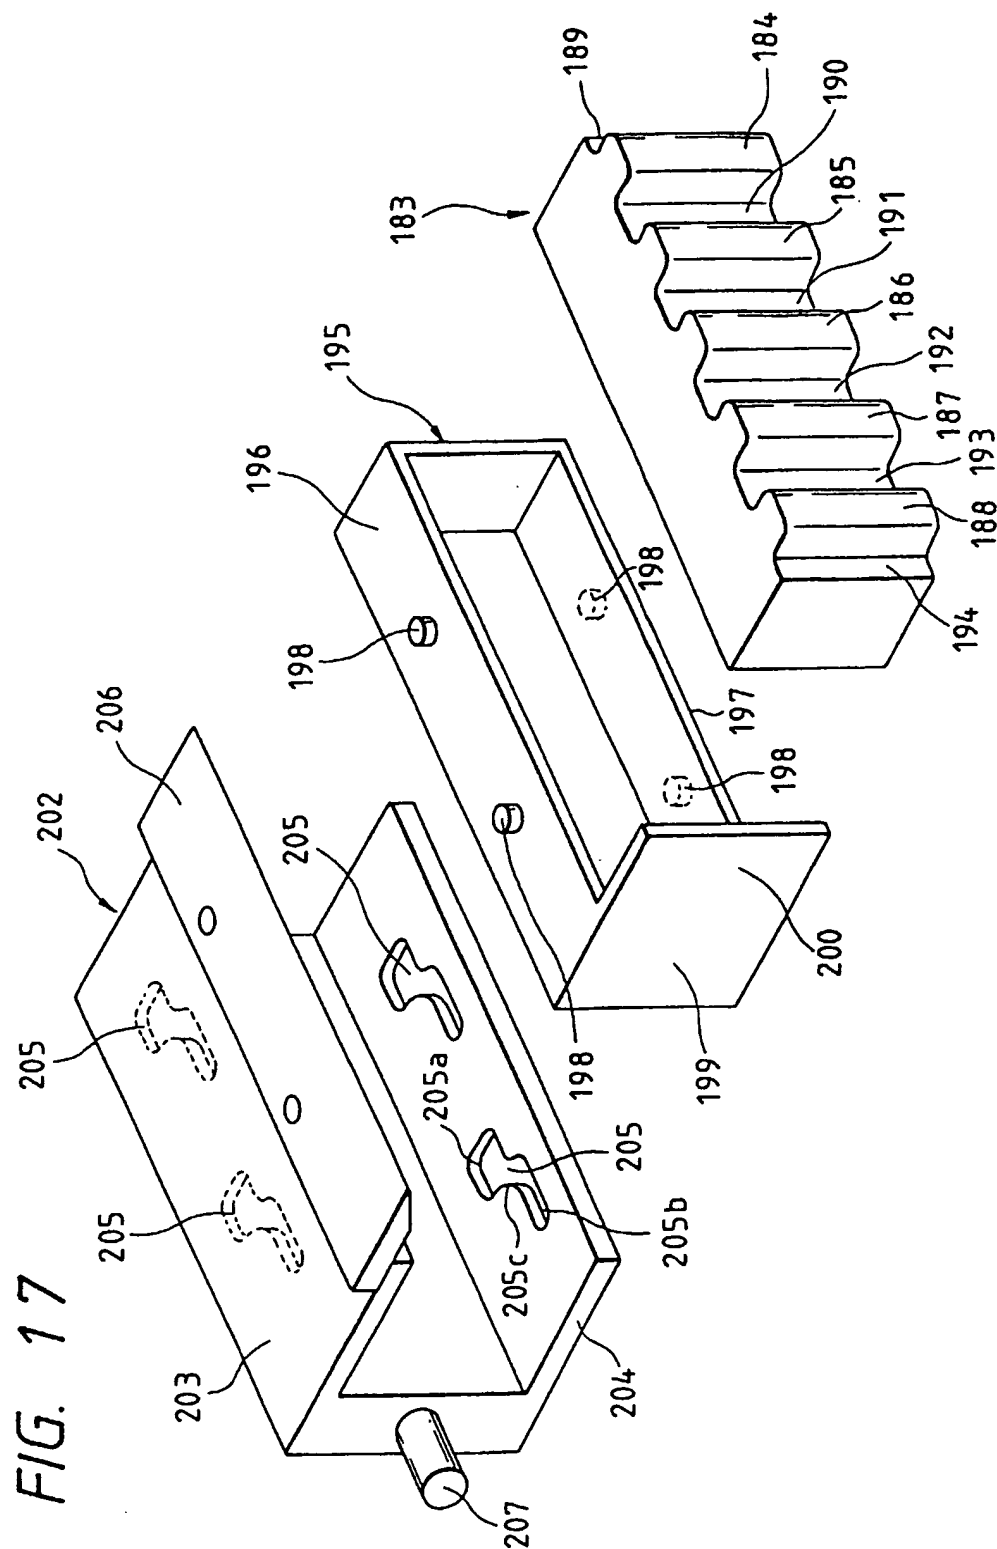

EP 0 714 778 B1

FIG. 19

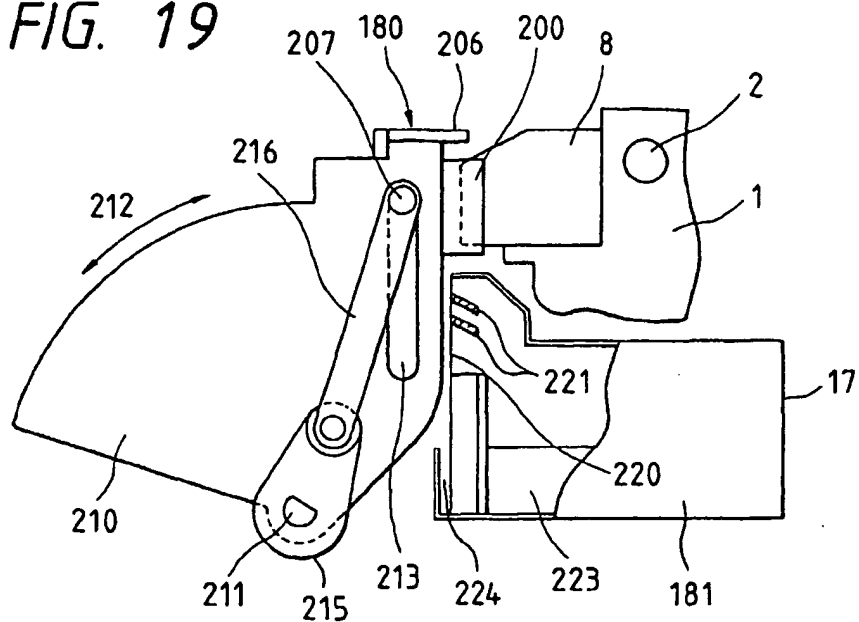


FIG. 21(a)


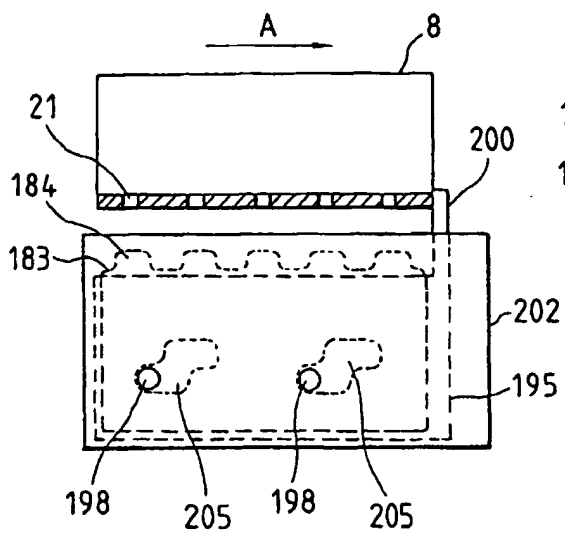


FIG. 21(b)

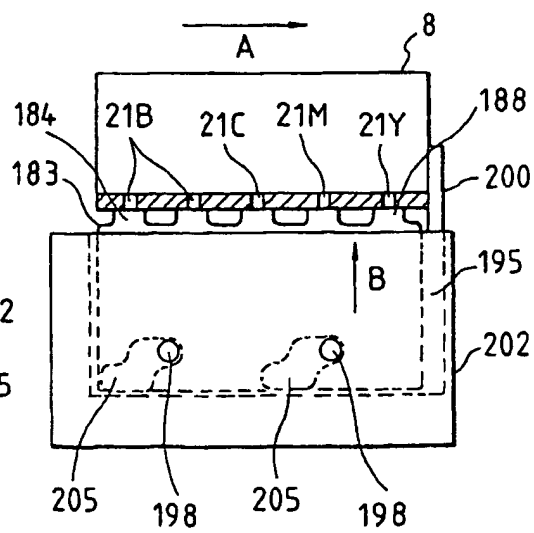

EP 0 714 778 B1

FIG. 20(a)

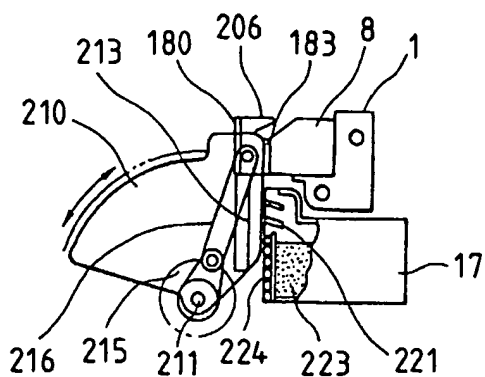


FIG. 20(b)

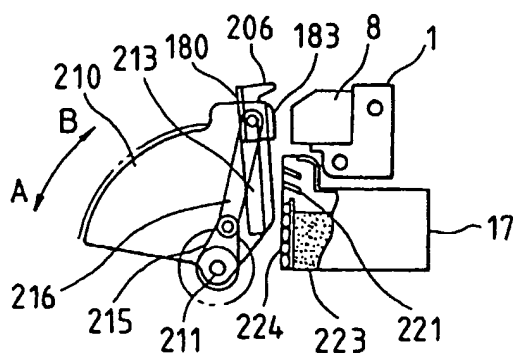


FIG. 20(c)



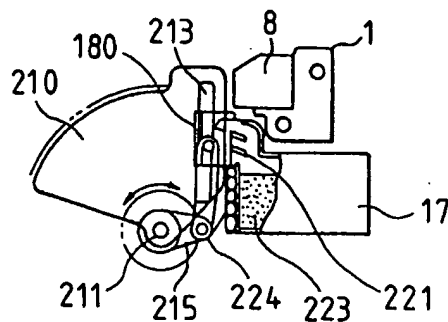


FIG. 20(d)

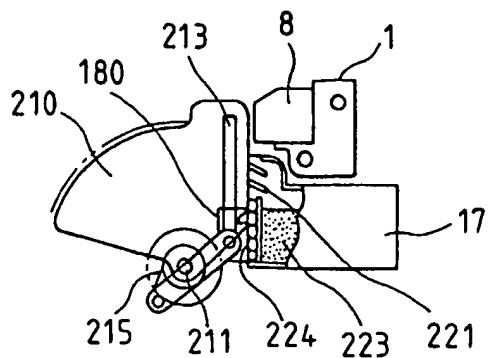


EP 0 714 778 B1

FIG. 22

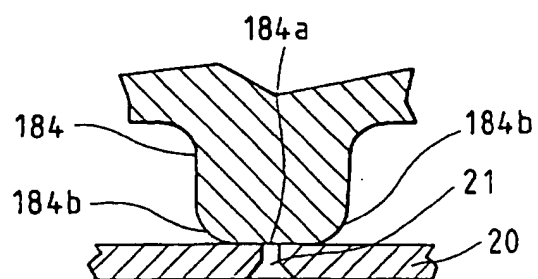


EP 0 714 778 B1

**FIG. 23**

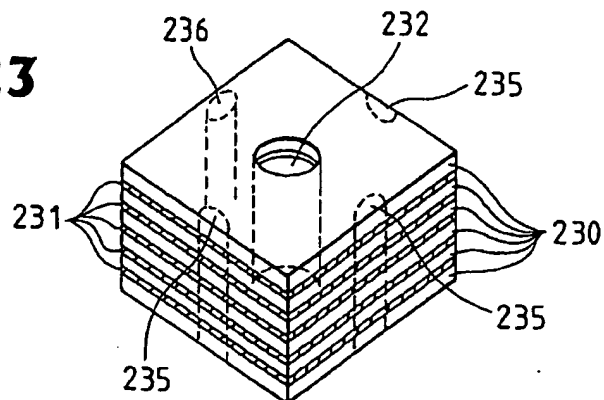

**FIG. 24 (a) FIG. 24 (b) FIG. 24 (c)**

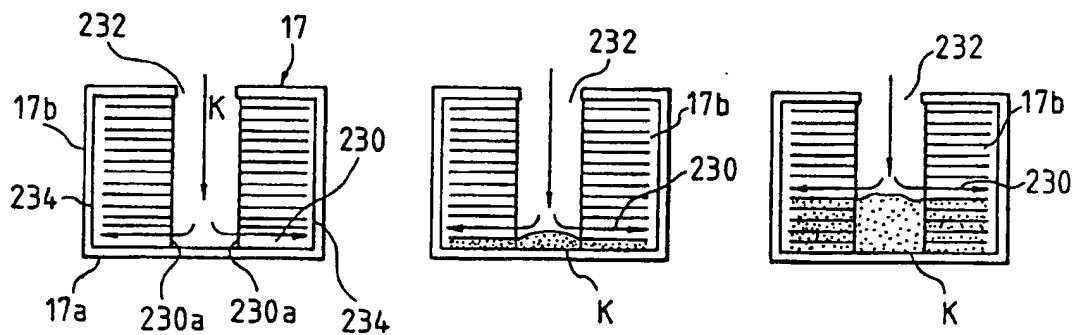

**FIG. 25**

